

## L13895 series

### High power LED, peak emission wavelength: 1.45 μm

The L13895 series is a high-power LED that emits infrared light at a peak of 1.45 μm. A bullet-shaped package (L13895-0145P) and a surface mount type (L13895-0145G) are available. It offers high output power, high reliability and low cost.

#### Features

- High output
- Low cost
- High reliability
- Bullet-shaped package: **L13895-0145P**
- Small and surface mount type: **L13895-0145G**
- Compatible with lead-free reflow: **L13895-0145G**

#### Applications

- Light sources for foreign object sorting
- Moisture meters

#### Absolute maximum ratings (Ta=25 °C unless otherwise noted)

Parameter	Symbol	Condition	L13895-0145P	L13895-0145G	Unit
Reverse voltage	V <sub>R</sub> max		1	1	V
Forward current	I <sub>F</sub> max		100	80	mA
Forward current decrease rate	ΔI <sub>F</sub>	Ta>25 °C	1	0.8	mA/°C
Pulse forward current	I <sub>FP</sub> max	*1	1	0.5	A
Pulse forward current decrease rate	ΔI <sub>FP</sub>	Ta>25 °C	10	5	mA/°C
Power dissipation	P <sub>d</sub> max		0.15		W
Operating temperature	T <sub>opr</sub>	No dew condensation*2	-30 to +85	-30 to +85	°C
Storage temperature	T <sub>stg</sub>	No dew condensation*2	-30 to +100	-40 to +100	°C
Soldering conditions	-		230 °C, within 5 s, at least 2 mm away from resin bottom surface		-
Reflow soldering conditions	T <sub>sol</sub>	JEDEC level 2a	-	Peak temperature: 250 °C, 2 times	

\*1: Pulse width=10 μs, duty ratio=1%

\*2: When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.


Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

#### Electrical and optical characteristics (Ta=25 °C)


Parameter	Symbol	Condition	L13895-0145P			L13895-0145G			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Peak emission wavelength	λ <sub>p</sub>	I <sub>F</sub> =50 mA	1400	1450	1500	1400	1450	1500	nm
Spectral half width	Δλ	I <sub>F</sub> =50 mA	-	120	170	-	120	170	nm
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =50 mA	-	0.9	1.3	-	0.9	1.2	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =1 V	-	-	10	-	-	10	μA
Radiant flux	φ <sub>e</sub>	I <sub>F</sub> =50 mA	-	5	-	3	4	-	mW
Radiant intensity	I <sub>e</sub>	I <sub>F</sub> =50 mA	12	20	-	-	-	-	mW/sr
Cutoff frequency*2	f <sub>c</sub>	I <sub>F</sub> =50 mA ± 10 mAp-p	5	10	-	5	10	-	MHz

\*2: Frequency at which the optical output drops by 3 dB relative to the output at 100 kHz


**Emission spectrum**

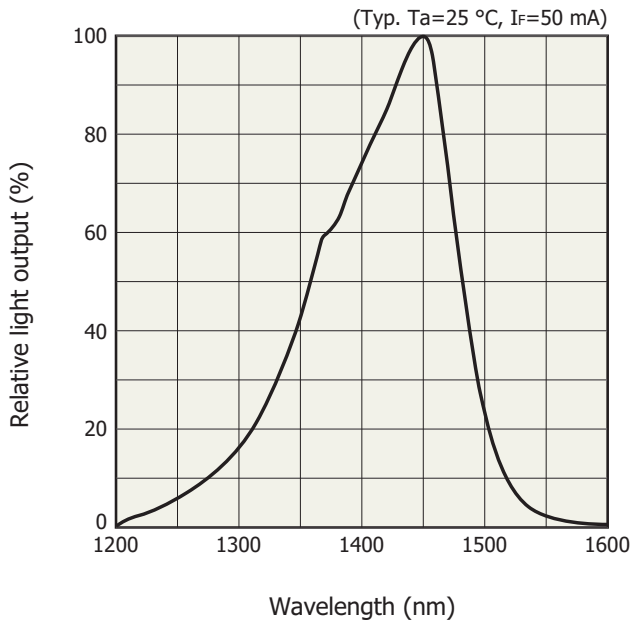

**Pulse forward current vs. pulse forward voltage**

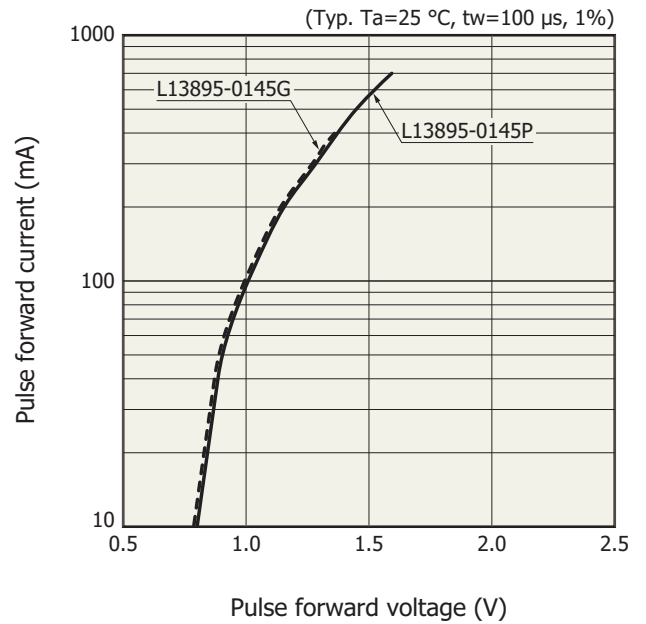


**Radiant flux vs. pulse forward current**

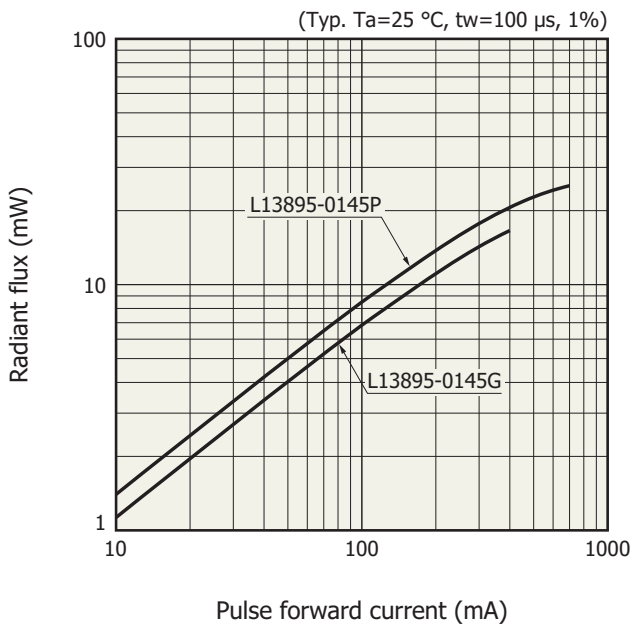


Directivity

L13895-0145P

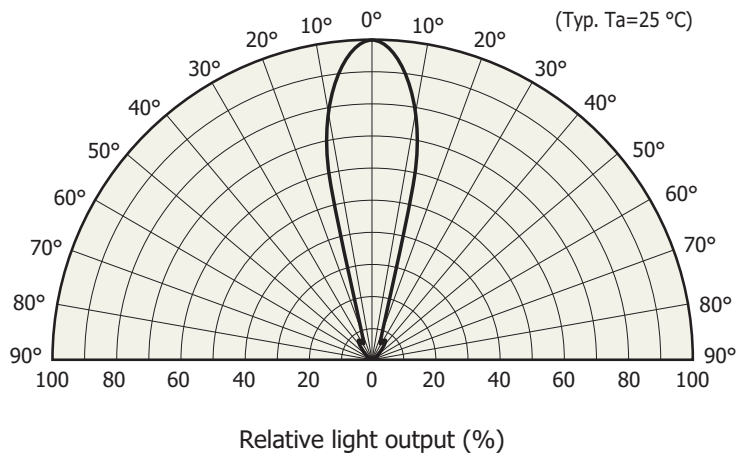


KLEDB0469EA

L13895-0145G

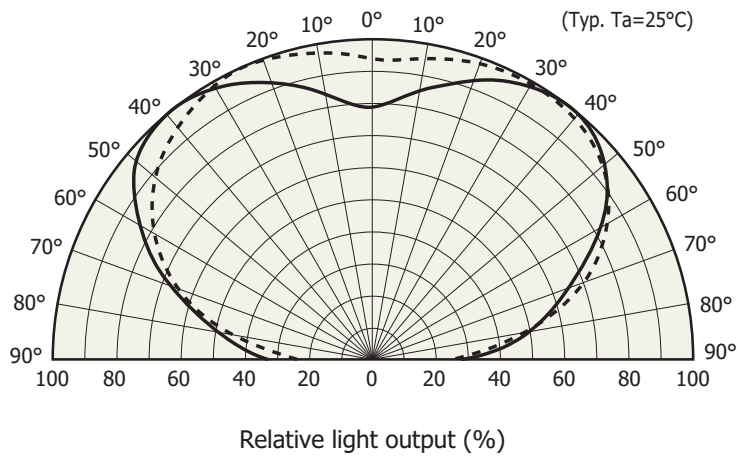


KLEDB0487EB

Light output vs. ambient temperature

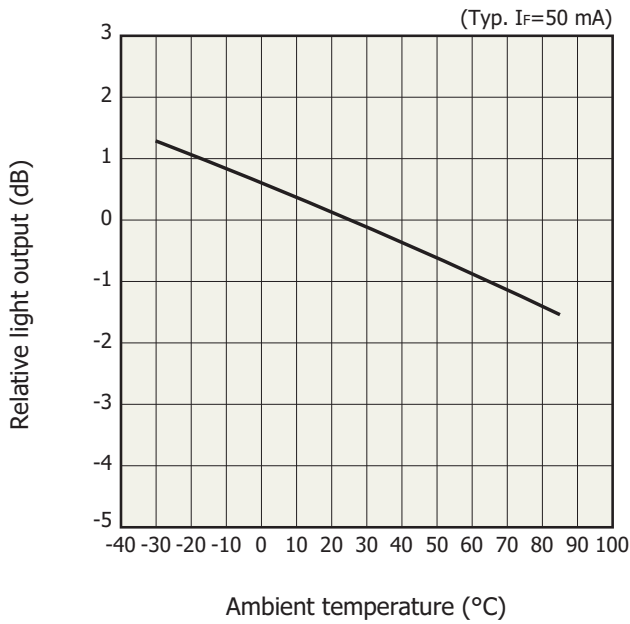

KLEDB0470EA


Allowable forward current vs. ambient temperature

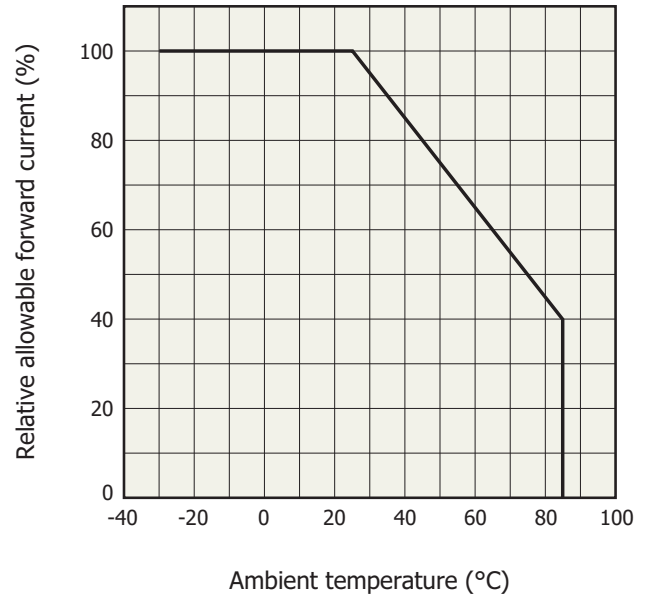

KLEDB0471EA


Allowable forward current vs. duty ratio

L13895-0145P

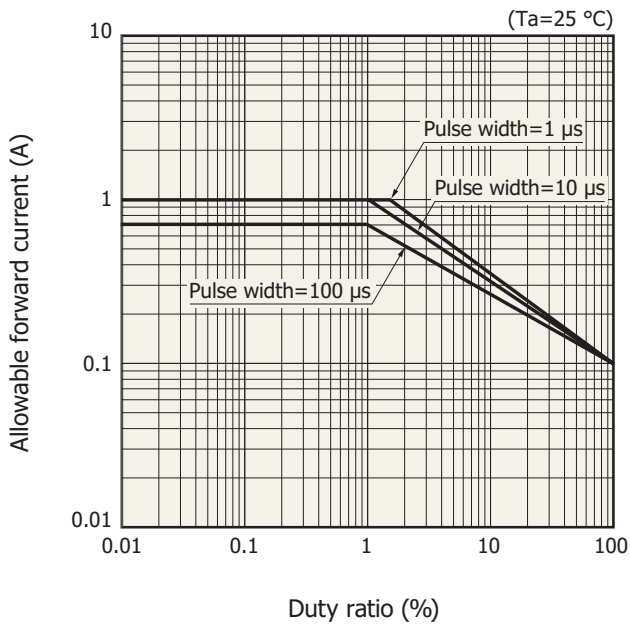


KLEDB0472EA

L13895-0145G

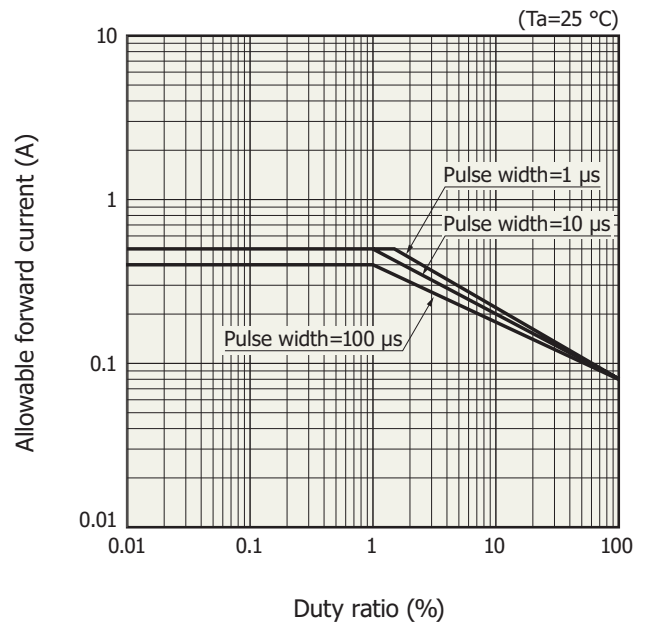

KLEDB0488EA

Recommended solder reflow conditions (Apply to L13895-0145G)

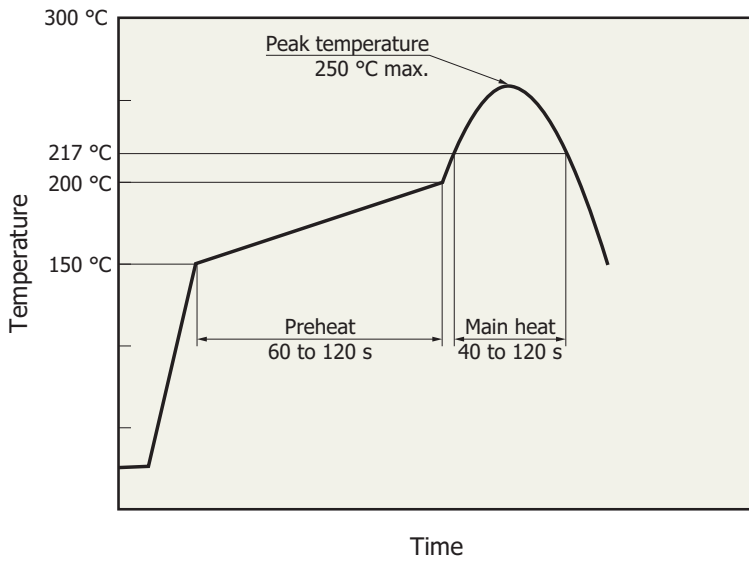


KLEDB0536EA

- After unpacking, store it in an environment at a temperature of 30 °C or less and a humidity of 60% or less, and perform soldering within 4 weeks.
- The effect that the product receives during reflow soldering varies depending on the circuit board and the reflow oven that are used.
- When you set reflow soldering conditions, check that problems do not occur in the product by testing out the conditions in advance.

Dimensional outline (unit: mm)


L13895-0145P

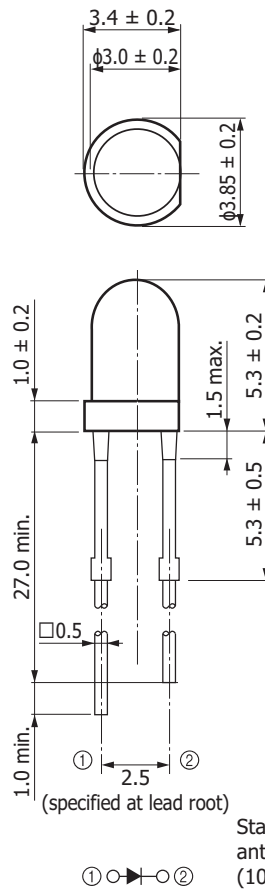

KLEDA0098EC

## L13895-0145G

Recommended land pattern

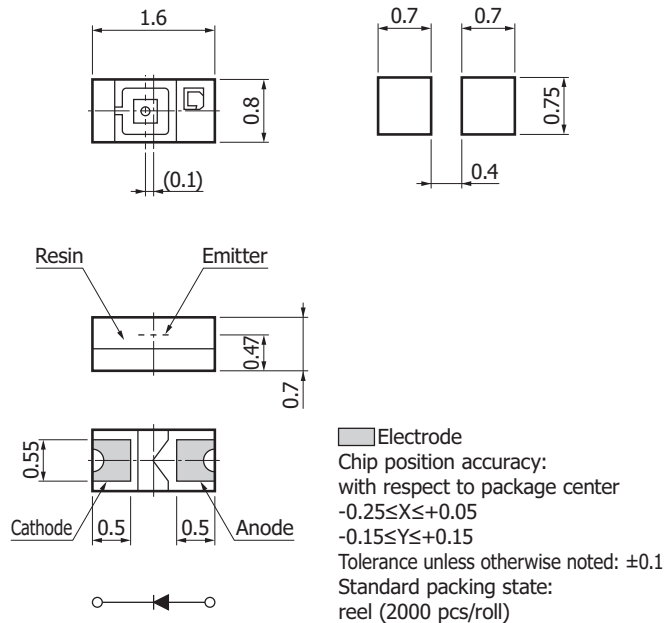

KLEDA0107EA

## Related information

[www.hamamatsu.com/sp/ssd/doc\\_en.html](http://www.hamamatsu.com/sp/ssd/doc_en.html)

### Precautions

- Disclaimer
- Metal, ceramic, plastic packages
- Surface mount type products

Information described in this material is current as of July 2019.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

# HAMAMATSU

[www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218, E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8, E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777, E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01, E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41, E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R.China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866, E-mail: [hpc@hamamatsu.com.cn](mailto:hpc@hamamatsu.com.cn)

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No. 158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081, E-mail: [info@hamamatsu.com.tw](mailto:info@hamamatsu.com.tw)