

Si APD

S8890 series

Long wavelength type APD

Features

- High sensitivity
- High gain
- Low terminal capacitance

Applications

- YAG laser detection
- Long wavelength light detection

Structure / Absolute maximum ratings

Type no.	Dimensional outline/Window material*1	Package	Effective photosensitive area size*2 (mm)	Effective photosensitive area (mm ²)	Absolute maximum ratings	
					Operating temperature Topr (°C)	Storage temperature Tstg (°C)
S8890-02	(1)/K	TO-5	φ0.2	0.03	-20 to +85	-55 to +125
S8890-05			φ0.5	0.19		
S8890-10			φ1.0	0.78		
S8890-15			φ1.5	1.77		
S8890-30	(2)/K	TO-8	φ3.0	7.0		

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

*1: K=borosilicate glass


*2: Area in which a typical gain can be obtained

Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)

Type no.	Spectral response range λ (nm)	Peak*3 sensitivity wavelength λp (nm)	Breakdown voltage VBR ID=100 μA		Temp. coefficient of VBR (V/°C)	Dark*3 current ID		Terminal*3 capacitance Ct (pF)	Cutoff*3 frequency fc RL=50 Ω (MHz)	Excess*3 noise figure x λ=800 nm	Gain M λ=800 nm
			Typ. (V)	Max. (V)		Typ. (nA)	Max. (nA)				
S8890-02	400 to 1100	940	500	800	3.5	0.2	2	0.2	280	0.3	100
S8890-05						1.5	15	0.5	240		
S8890-10						5.0	50	1.5	230		
S8890-15						10.0	100	2.5	220		
S8890-30						15.0	150	8.0	220		


*3: Values measured at a gain listed in the characteristics table

Spectral response

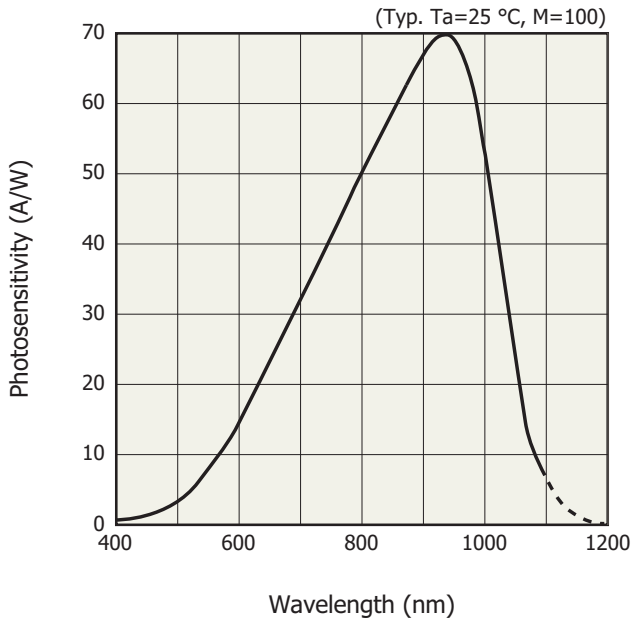


KAPDB0064EB

Dark current vs. reverse voltage

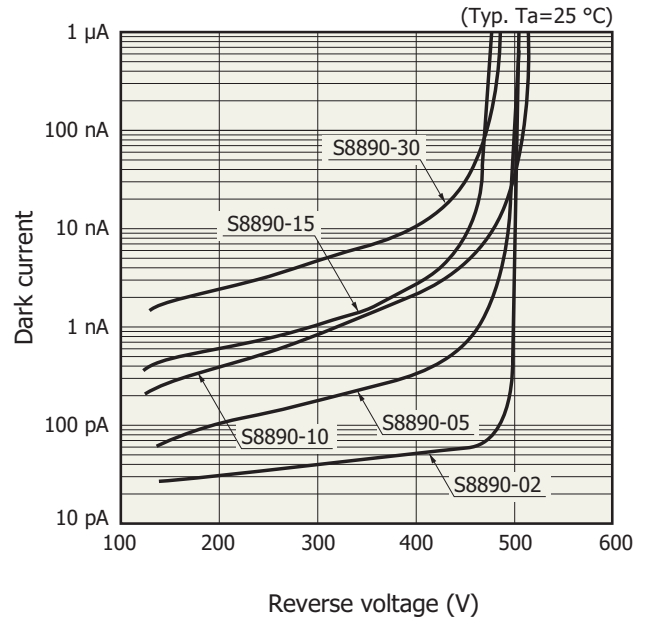


KAPDB0065EA

Gain vs. reverse voltage

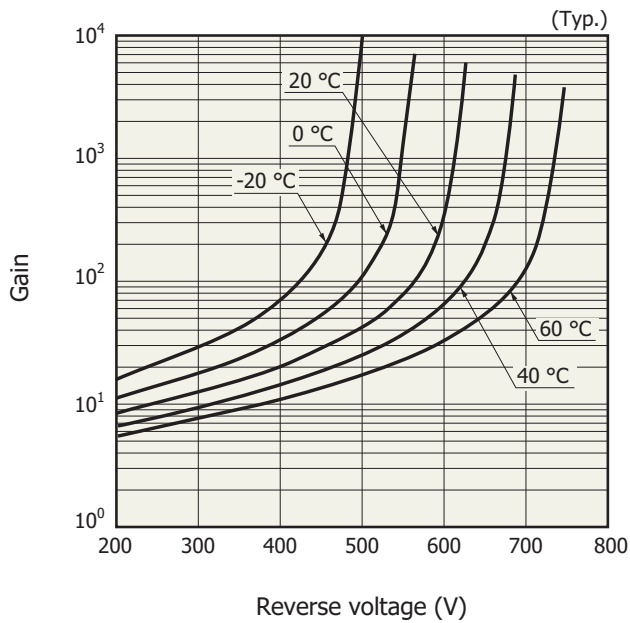

KAPDB0066EB




Terminal capacitance vs. reverse voltage

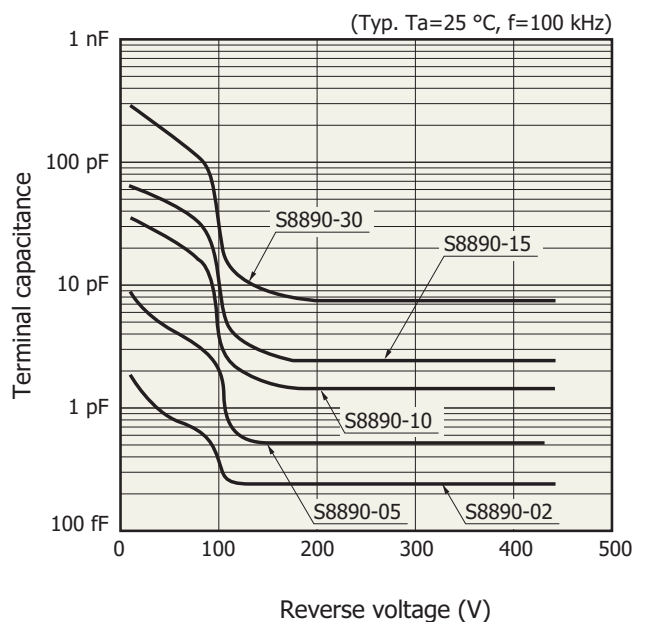

KAPDB0067EA

Dimensional outlines (unit: mm)

(1) S8890-02/-05/-10/-15

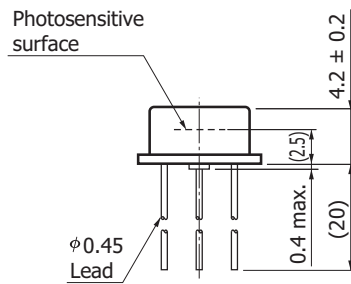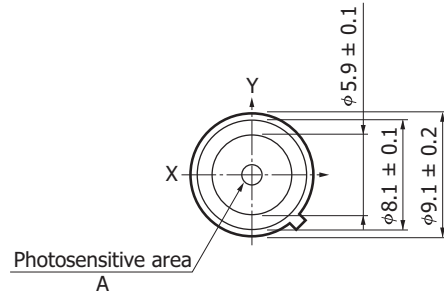


Distance from photosensitive area center to cap center

$-0.3 \leq X \leq +0.3$

$-0.3 \leq Y \leq +0.3$


The borosilicate glass window may extend a maximum of 0.2 mm above the upper surface of the cap.



Type no.	A
S8890-02	φ0.2
S8890-05	φ0.5
S8890-10	φ1.0
S8890-15	φ1.5

KAPDA0024EB

(2) S8890-30

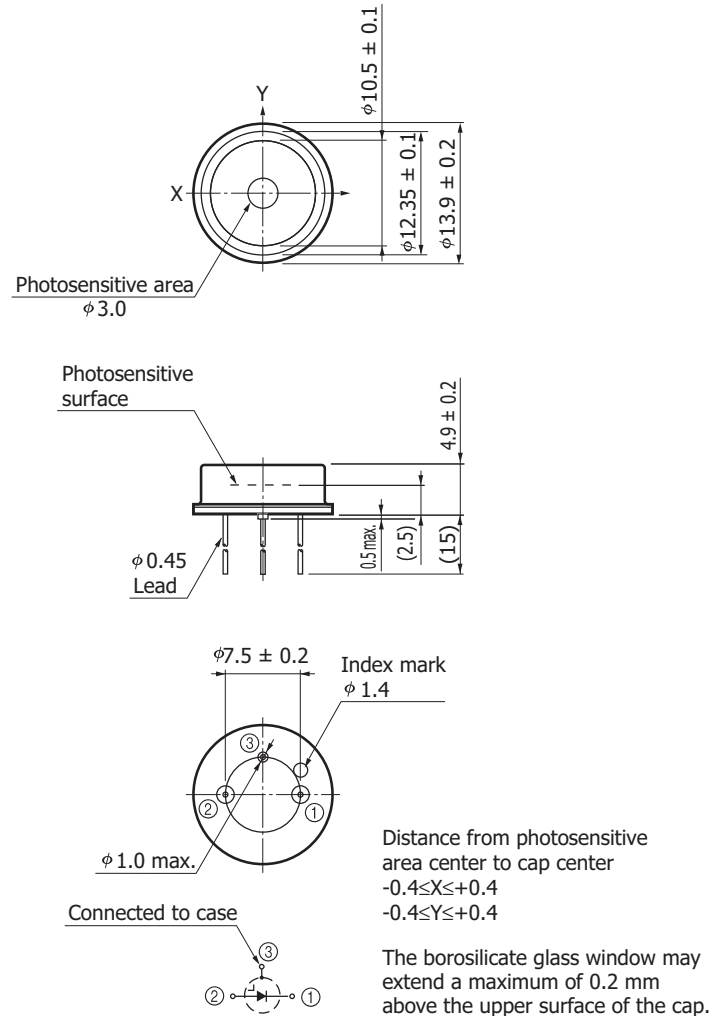

KAPDA0025EB

Information described in this material is current as of September, 2012.

Product specifications are subject to change without prior notice due to improvements or other reasons. Before assembly into final products, please contact us for the delivery specification sheet to check the latest information.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use.

Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Thorshamnsgatan 35 16440 Kista, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1 int. 6, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

China: Hamamatsu Photonics (China) Co., Ltd.: 1201 Tower B, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866