

## HIGH VOLTAGE POWER SUPPLY SOCKET ASSEMBLY WITH TRANSIMPEDANCE AMPLIFIER C14019-02

The C14019-02 is a high voltage power supply socket assembly for 28 mm (1-1/8 inch) diameter head-on photomultiplier tubes (PMT), incorporating a regulated high voltage power supply, an active voltage divider, and a transimpedance amplifier, having a wide bandwidth (DC to 5 MHz). It enables simple yet stable PMT operations with extended DC output linearity by only supplying  $\pm 15$  V and connecting to a potentiometer or a 0 to +6 V for high voltage adjustment.



### FEATURES

- Superior DC output linearity
- Low ripple / noise
- Fast high voltage programming response
- Including high transimpedance amplifier
- Amplifier with wide frequency band (DC to 5 MHz)

### SPECIFICATIONS

Parameter		Description / Value	Unit
Applicable photomultiplier tubes		$\phi 28$ mm (1-1/8 inch) head-on type <sup>①</sup>	—
Input voltage		$\pm 15 \pm 1$	V
Maximum input voltage		$\pm 18$	V
Vref output voltage	Typ.	6.1	V
Maximum input current <sup>②</sup>		Vcc: 82, Vee:-20	mA
Linear DC output current of PMT <sup>③④</sup>		20 (load resistance 50 $\Omega$ )	$\mu$ A
Amplifier	Frequency bandwidth (-3 dB)	DC to 5 MHz	—
	Current to voltage conversion factor	0.15 (load resistance 50 $\Omega$ )	V/ $\mu$ A
	Maximum output signal voltage	+3 (load resistance 50 $\Omega$ )	V
	Output signal offset voltage	Typ. $\pm 10$	mV
	Output signal ripple / noise <sup>⑤</sup> (rms)	Max. 10	mV
	Amplifying method	Inverting output	—
High voltage power supply	Output voltage range	0 to -1500	V
	Line regulation against 1 V input change <sup>③</sup>	Typ. $\pm 0.01$	%
	Output voltage control	Control voltage (0 V to +6 V) or potentiometer (50 k $\Omega$ )	—
	Control voltage input impedance	100	k $\Omega$
	Output voltage programming response <sup>⑥</sup>	Typ. 80	ms
Temperature coefficient <sup>③</sup>	Typ. $\pm 0.01$	%/ $^{\circ}$ C	
Operating ambient temperature / humidity <sup>⑦</sup>		0 $^{\circ}$ C to +40 $^{\circ}$ C / Below 85 %	—
Storage temperature / humidity <sup>⑦</sup>		-15 $^{\circ}$ C to +60 $^{\circ}$ C / Below 90 %	—
Weight		60	g

NOTE: <sup>①</sup>R374, R2228, R5929, etc. <sup>②</sup>Without PMT <sup>③</sup>Input voltage =  $\pm 15$  V, Control voltage = +4 V <sup>④</sup>Within:  $\pm 2$  % linearity <sup>⑤</sup>Load resistance = 1 M $\Omega$ , Load capacitance = 22 pF <sup>⑥</sup>For 0 % to 99 % high voltage change <sup>⑦</sup>No condensation

Figure 1: DC linearity characteristics


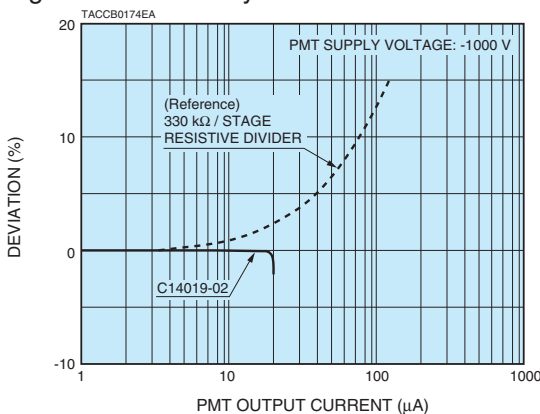


Figure 2: Practical PMT DC output limits

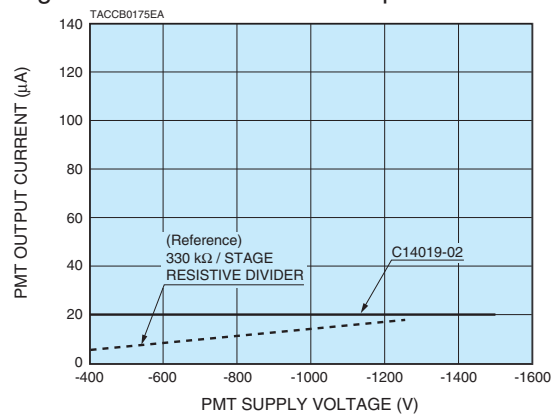

# HIGH VOLTAGE POWER SUPPLY SOCKET ASSEMBLY WITH TRANSIMPEDANCE AMPLIFIER C14019-02

Figure 3: Output voltage vs. control voltage

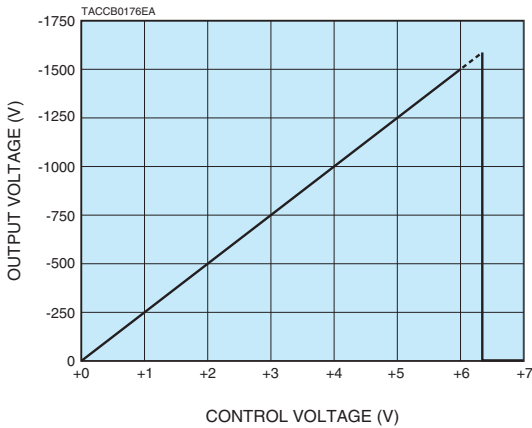


Figure 4: Frequency bandwidth



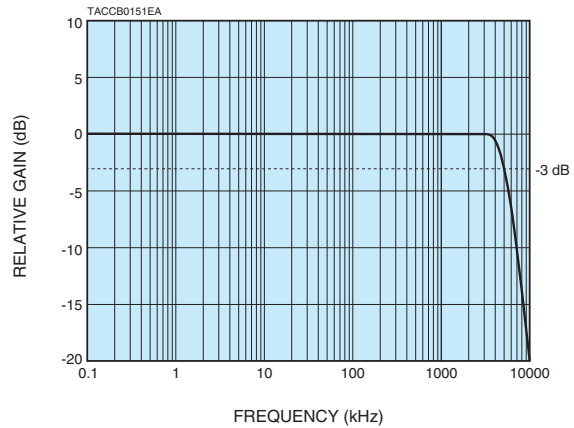


Figure 5: Adjustment method of high voltage

● OUTPUT VOLTAGE CONTROLLING BY EXTERNAL VOLTAGE

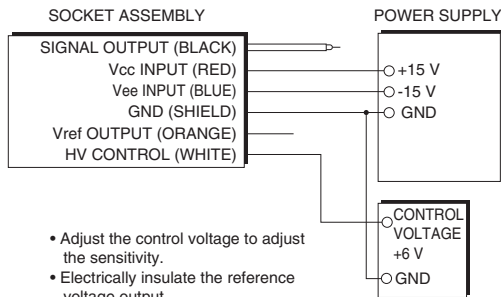


● OUTPUT VOLTAGE CONTROLLING BY EXTERNAL POTENTIOMETER

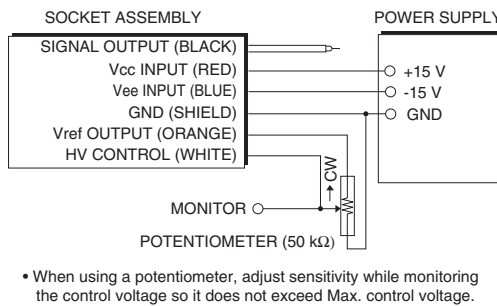


TACCC0185EA

Figure 6: Schematic diagram

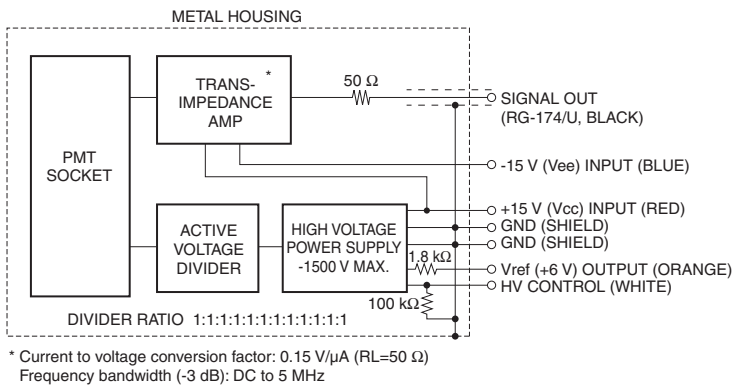

TACCC0186EA

Figure 7: Dimensional outline (Unit: mm)

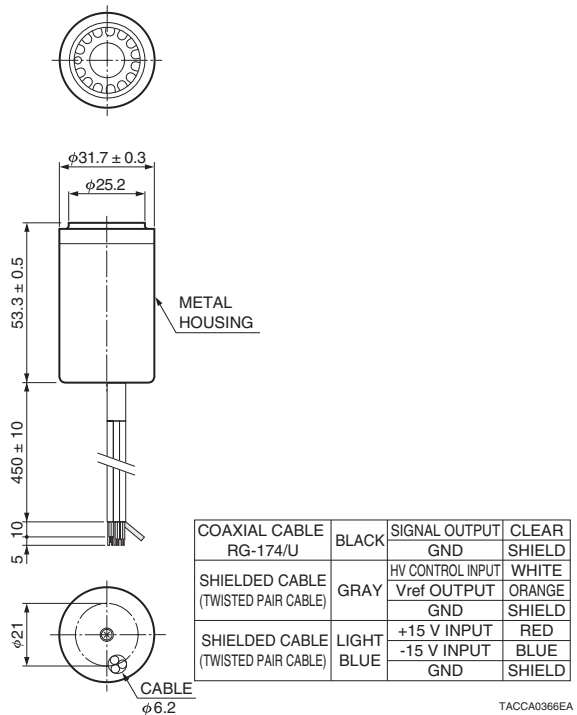

TACCA0366EA

## HAMAMATSU PHOTONICS K.K. www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: info@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01 E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: info@hamamatsu.it

China: Hamamatsu Photonics (China) Co., Ltd.: 1201 Tower B, Jaming Center, 27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R.China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No.158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: info@hamamatsu.com.tw

TACC1085E01  
FEB. 2019 IP