

The C6080 is a compact handy UV power meter designed to measure UV intensity of UV-LED light sources. It is easy to carry around and operate, and so can be easily used for daily check. The C6080 shows almost no deterioration in its sensitivity even after exposed to UV light, making it possible to make measurements with high repeatability.



FEATURES


- Compact and lightweight
- Excellent accuracy
- Absolute value display of UV intensity (mW/cm²)
- Sensor head isolated from display unit allows flexible measurement
- 200-hours continuous operation by 9 V battery (006P)
- External output (analog output)

APPLICATIONS


- UV intensity measurement during UV adhesive curing and UV ink drying
- UV intensity measurement of various UV-LED light sources

Figure 1: Typical spectral response

● C6080-365/-365-03

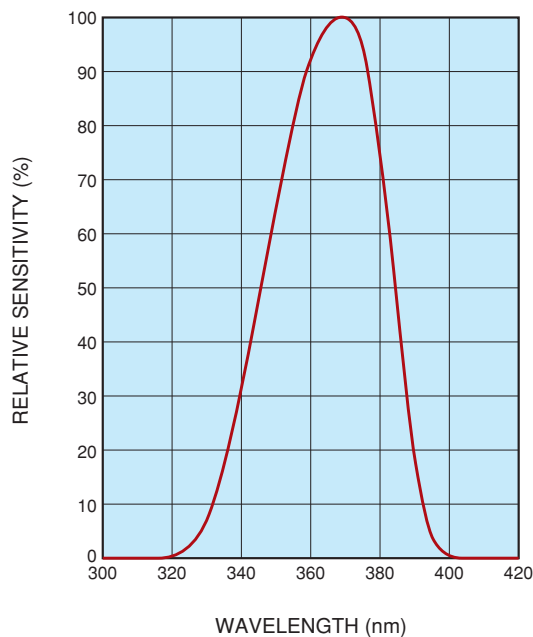

● C6080-385

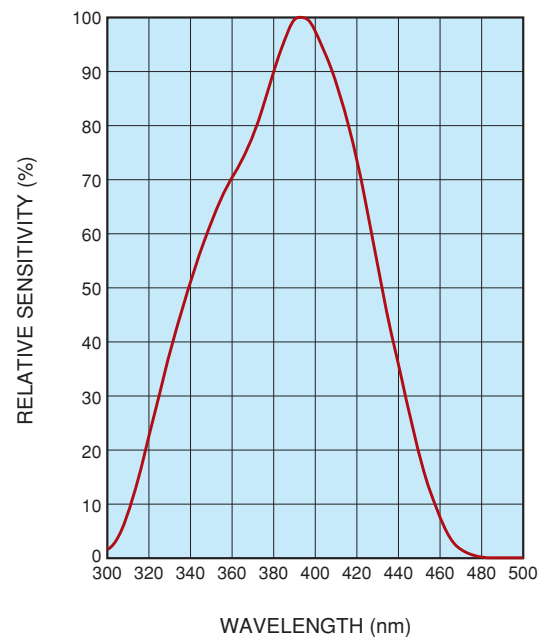


UV POWER METERS C6080 SERIES

SPECIFICATIONS

Parameter		C6080-365	C6080-365-03	C6080-385	Unit
Sensitive wavelength range		320 to 400		300 to 470	nm
Calibrated wavelength		365		385	nm
Sensitive area		φ1			mm
Optical power measurement range*1	SENS.LO	10 to 19,990	1 to 1,999	10 to 19,990	mW/cm ²
	SENS.HI	1 to 1,999	0.1 to 199.9	1 to 1,999	mW/cm ²
Display		3-1/2 digits Liquid crystal digital display			—
Sampling interval		2.5			time/s
External output (analog)		1.000 V per liquid crystal display "1000"			—
Operating temperature range		0 °C to +50 °C			—
Storage temperature range		-10 °C to +50 °C			—
Operating humidity range		Below 80 % (no condensation)			—
Storage humidity range		Below 80 % (no condensation)			—
Power requirement		9 V battery (006P) 1 piece			—
Current consumption		Max. 2			mA
Weight	Display unit (including battery)	200			g
	Sensor head (including cable)	80			g
Carrying case size (W × H × D)		330 × 230 × 70			mm

*1: Since the C6080 is calibrated using its sensitivity wavelengths, the display value may differ when measuring a light source whose spectrum differs from the sensitivity wavelengths.
To maintain the reliability of the calibration values, it is recommended to calibrate the C6080 once a year.

Figure 2: Dimensional outline (Unit: mm)

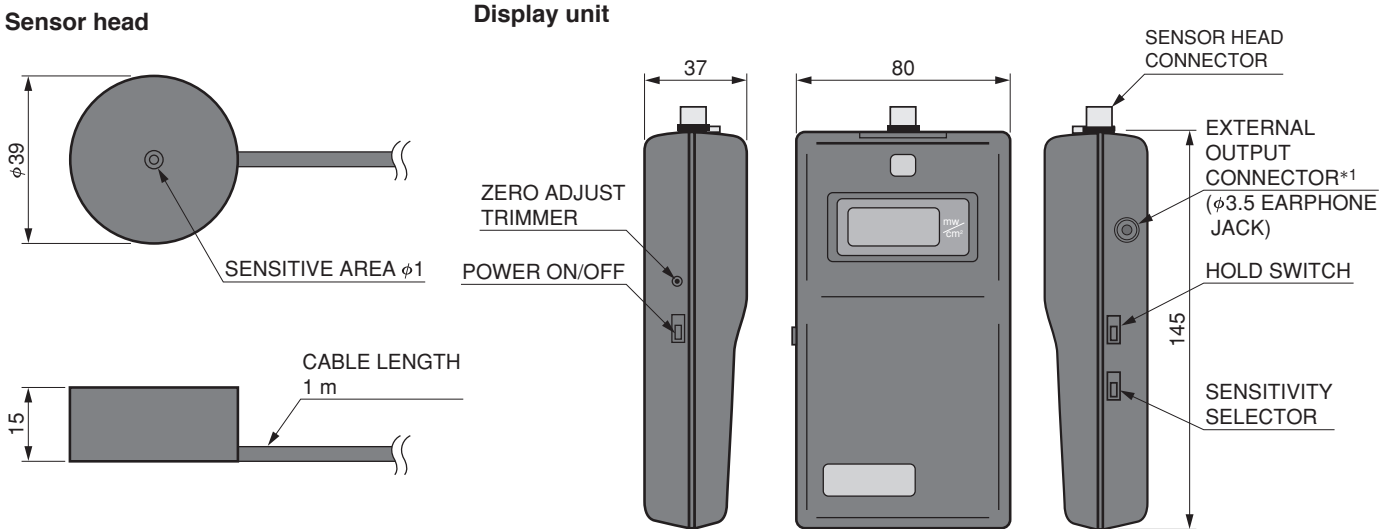

*1: External output connector plug: MP-106PC (Marushin electric mfg.) or equivalent

HAMAMATSU PHOTONICS K.K. www.hamamatsu.com

Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: HAMAMATSU CORPORATION: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: HAMAMATSU PHOTONICS DEUTSCHLAND GMBH.: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: info@hamamatsu.de

France: HAMAMATSU PHOTONICS FRANCE S.A.R.L.: 19 Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr

United Kingdom: HAMAMATSU PHOTONICS UK LIMITED: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: HAMAMATSU PHOTONICS NORDEN AB: Torshamnsgatan 35, 16440 Kista, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se

Italy: HAMAMATSU PHOTONICS ITALIA S.R.L.: Strada della Moia, 1 int. 6 20044 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: info@hamamatsu.it

China: HAMAMATSU PHOTONICS (CHINA) CO., LTD.: 1201, Tower B, Jianning Center, 27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R. China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn

Taiwan: HAMAMATSU PHOTONICS TAIWAN CO., LTD.: 8F-3, No.158, Section 2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: info@hamamatsu.com.tw

TLZS1013E03
MAR. 2023 IP