

L8013

## Easy optical axis alignment LED for PCF200 fiber data links

L8013 is a high-speed LED developed for optical data links using PCF200 fibers. L8013 uses a non-confined structure chip that does not show the abrupt deterioration often encountered in some types of confined chips, thus providing high reliability over extended operation time. The optical output at the fiber end usually tends to vary due to non-uniform LED chip thickness. L8013 minimizes this problem by using a light condensing reflector with a slight matching offset from the chip. This widens the fiber input beam profile so fine adjustment of the optical axis is not required.

### Features

- Easy optical axis alignment
- High-speed response: 50 MHz Typ.
- High optical output: 45  $\mu$ W Typ.  
( $I_F=30$  mA, when used with PCF200 fiber)
- High reliability

### Applications

- Optical data link

### Absolute maximum ratings ( $T_a=25$ °C, unless otherwise noted)

Parameter	Symbol	Condition	Value	Unit
Reverse voltage	$V_R$ Max.		3	V
Forward current	$I_F$		80	mA
Forward current decrease rate	-	$T_a > 25$ °C	0.8	mA/°C
Pulse forward current	$I_{FP}$	Pulse width=10 $\mu$ s Duty ratio=1 %	0.5	A
Pulse forward current decrease rate	-	$T_a > 25$ °C	5	mA/°C
Power dissipation	P		150	mW
Operating temperature	$T_{opr}$		-30 to +85	°C
Storage temperature	$T_{stg}$		-40 to +100	°C


### Electrical and optical characteristics ( $T_a=25$ °C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Peak emission wavelength	$\lambda_p$	$I_F=30$ mA	840	870	900	nm
Spectral half width	$\Delta\lambda$	$I_F=30$ mA	-	45	-	nm
Fiber end output *1	Pf	$I_F=30$ mA	30	45	-	$\mu$ W
Radiant flux	$\phi_e$	$I_F=30$ mA	4.5	6.5	-	mW
Forward voltage	$V_F$	$I_F=30$ mA	-	1.45	1.6	V
Reverse current	$I_R$	$V_R=3$ V	-	-	10	$\mu$ A
Cutoff frequency *2	f <sub>c</sub>	$I_F=30$ mA $\pm$ 4 mAp-p	30	50	-	MHz


\*1: PCF200 fiber; distance between fiber end and L8013 cap glass: 0.3 mm

\*2: Frequency at which the optical output decreases by -3 dB versus a reference output level at 100 kHz.


**Emission spectrum**

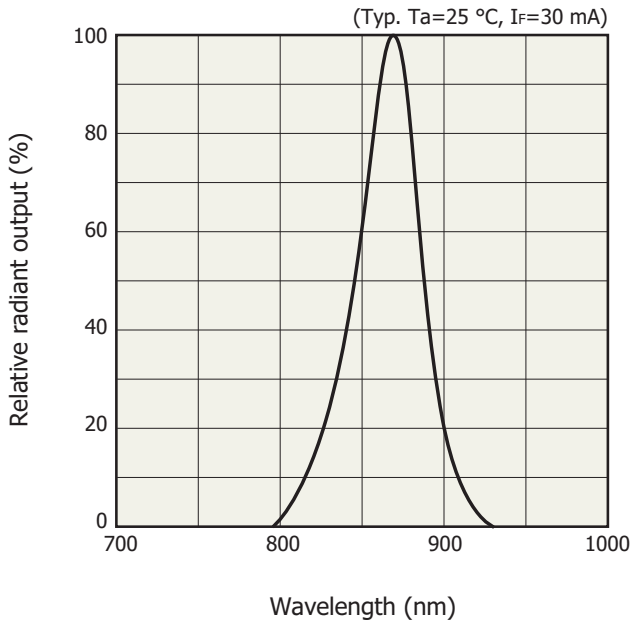


**Radiant flux vs. forward current**

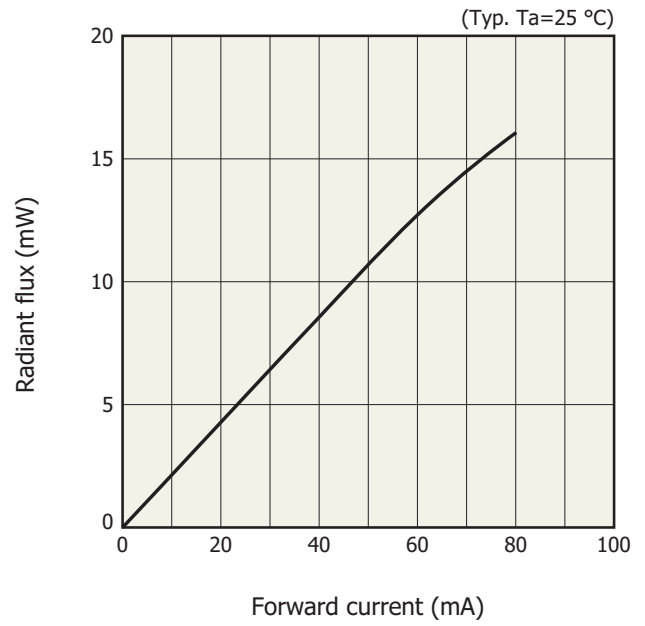

**Forward current vs. forward voltage**

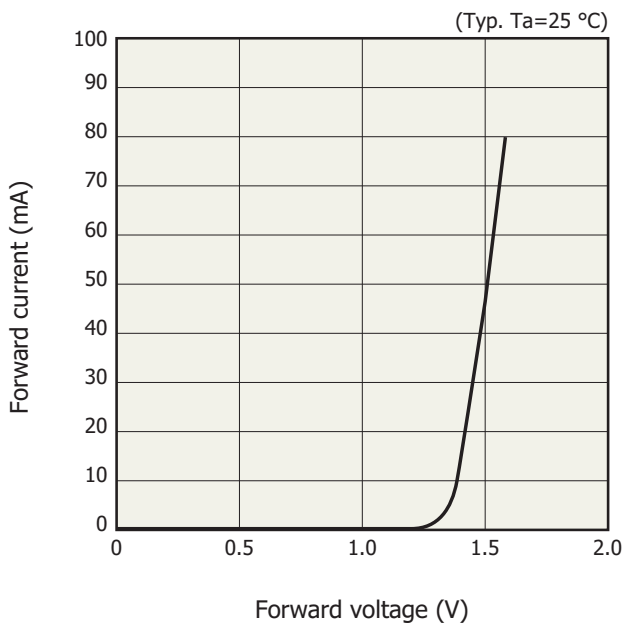


**Frequency response**

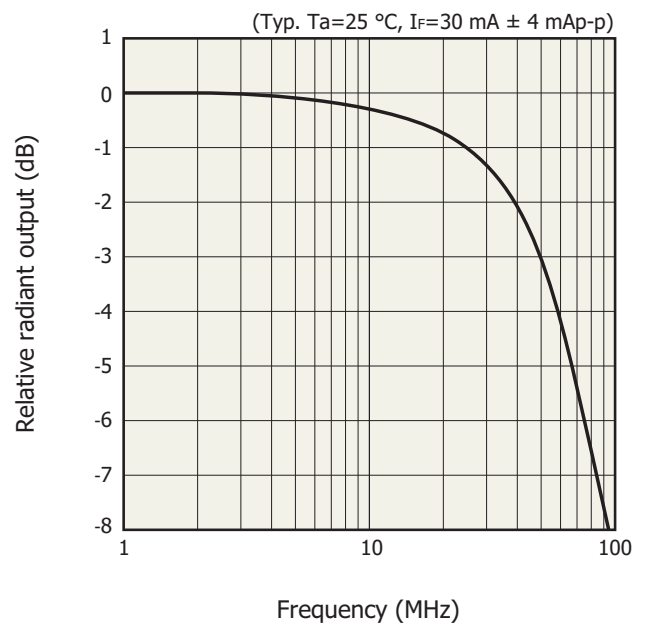


**Fiber coupling characteristics**


X, Y axes

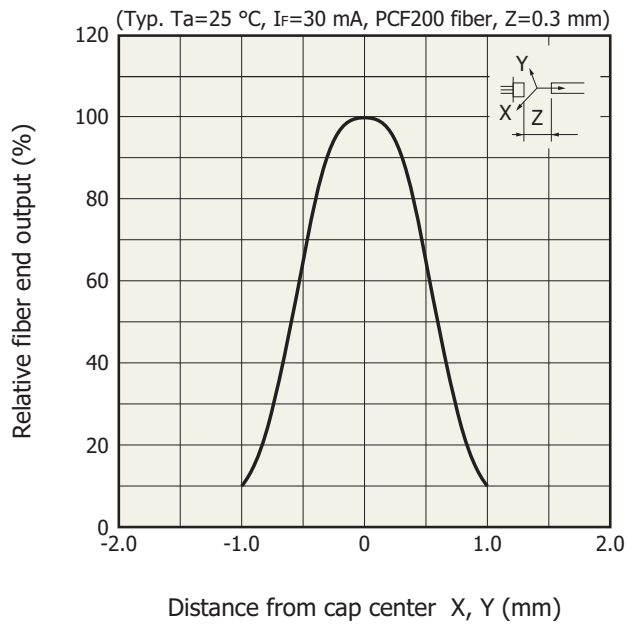


Z axis

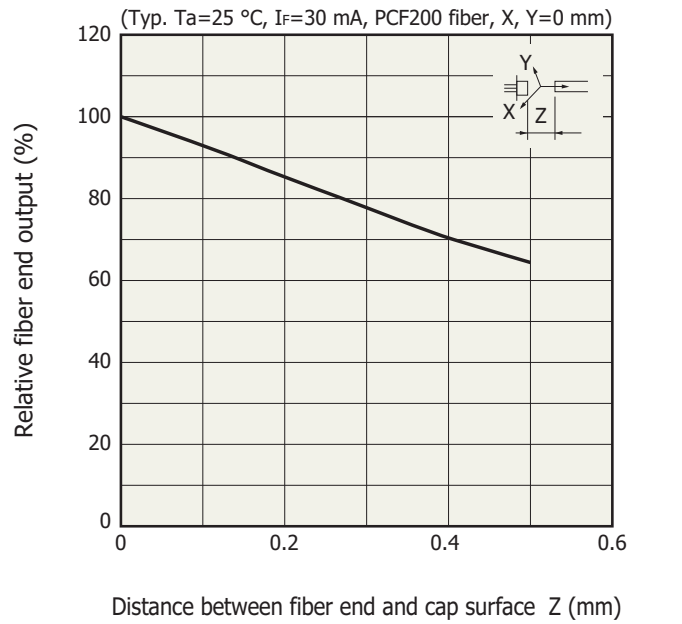


**Radiant output vs. ambient temperature**

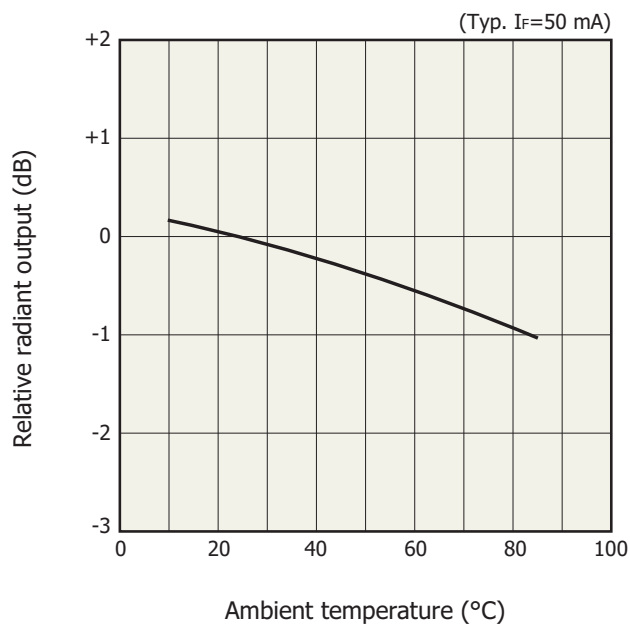

**Allowable forward current vs. ambient temperature**


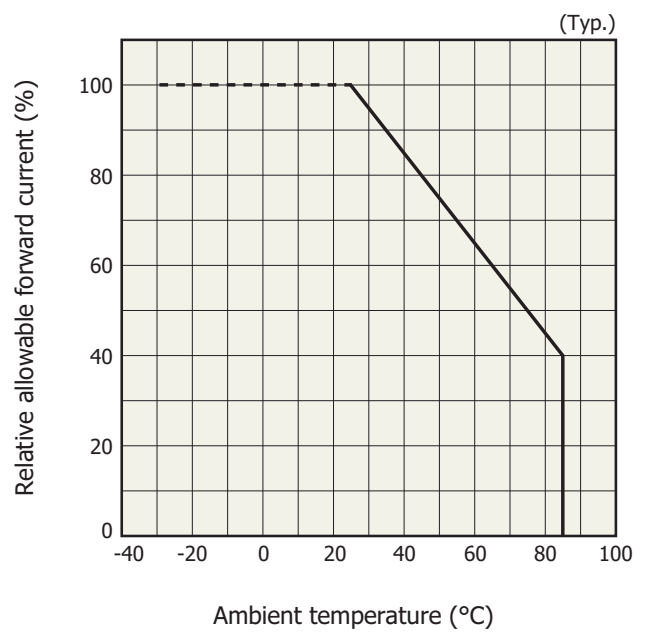


### Allowable forward current vs. duty ratio

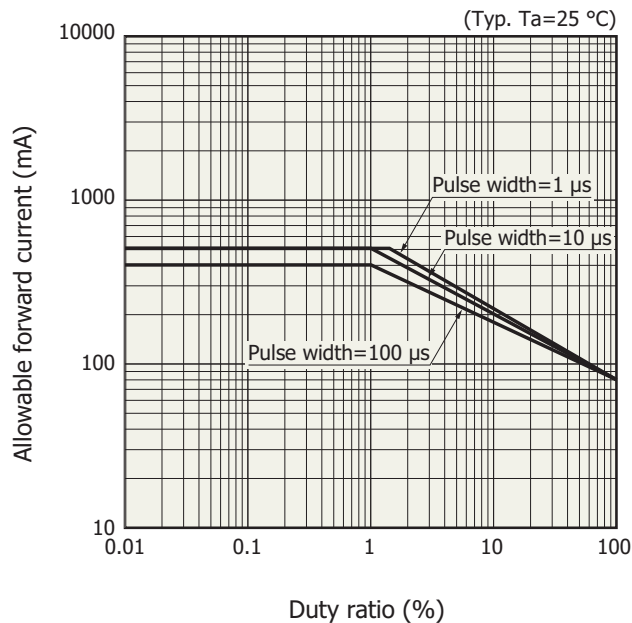


KLEDB0289EB

### Dimensional outline (unit: mm)

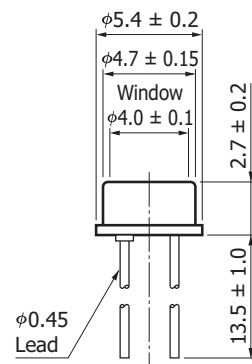

Common to case



KLEDA0073EB

### Related information

[www.hamamatsu.com/sp/ssd/doc\\_en.html](http://www.hamamatsu.com/sp/ssd/doc_en.html)

#### Precautions

- Disclaimer
- Metal, ceramic, plastic packages

#### Technical information

- LED

Information described in this material is current as of September 2017.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

# HAMAMATSU

[www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39) 02-93581733, Fax: (39) 02-93581741

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866