

Transmitter/receiver photo IC for optical link (DC to 1 Mbps, DC to 10 Mbps)

Contents

1. Overview

p.01

2. Features

p.02

3. Structure

p.02

4. Measurement method

p.03

5. Characteristics

p.03

6. Q&A

p.10


1. Overview

Optical fiber communication using plastic optical fibers (POF) features insusceptibility to external noise, high-speed data communication capability, and the like and is used in in-vehicle, FA, and consumer electronic optical networks.

Transmitter/receiver photo ICs for optical link are devices for POF optical communication.

The transmitter photo IC combines a red LED and a drive IC. The receiver photo IC monolithically integrates a photodiode and signal processing circuit to realize a digital output that is compatible with CMOS.

[Figure 1-1] Configuration example of optical communication using POF

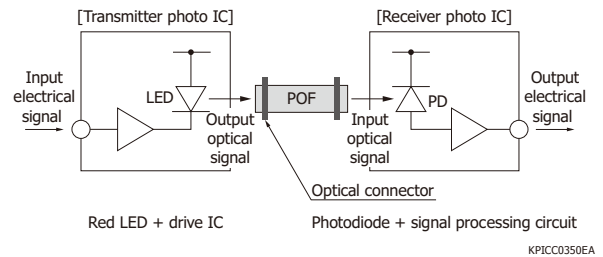

We provide transmitter/receiver photo ICs for optical link shown in Table 1-1.

[Table 1-1] Hamamatsu transmitter/receiver photo ICs for optical link

Type no.		Data rate (Mbps)	Operating supply voltage (V)	Input/output level
Transmitter photo IC	L12422-01SR	DC to 10	3.135 to 3.465	TTL
	L12557-01SR	DC to 10	4.75 to 5.25	
Receiver photo IC	S12512-01SR	DC to 1	3.135 to 3.465	CMOS
	S13174-01SR	DC to 10	3.135 to 3.465	
	S12423-01SR	DC to 10	3.135 to 3.465	

2. Features

- ▶ Transmitter photo IC and receiver photo IC are available.
- ▶ Monolithic structure (receiver photo IC)

Receiver photo ICs integrate the photodiode and signal processing circuit into a monolithic structure to reduce effects from external electromagnetic noise.

- ▶ Wide dynamic range (receiver photo IC)


3. Structure

Figure 3-1 (a) shows a block diagram of the transmitter photo IC. When an electrical signal is input, the LED emits light.


Figure 3-1 (b) shows a block diagram of the receiver photo IC. When an optical signal is input to the photodiode, an amplifier converts the current into voltage and amplifies the signal. Then, a comparator converts the signal into CMOS digital output.

[Figure 3-1] Block diagram

(a) Transmitter photo IC

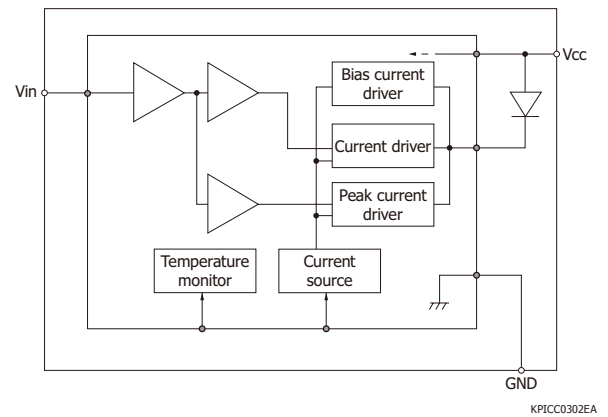

(b) Receiver photo IC

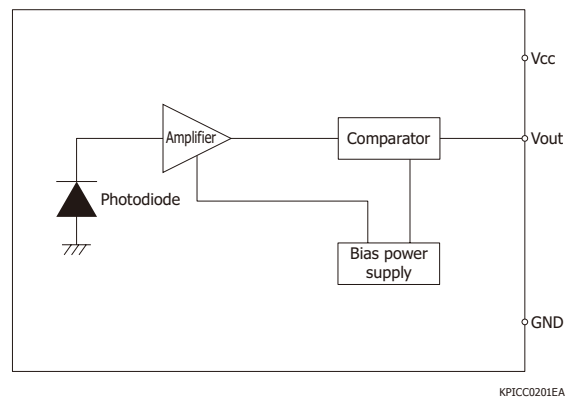


4. Measurement method

Figure 4-1 shows a measurement circuit for transmitter/receiver photo ICs for optical link.

[Figure 4-1] Measurement circuit


(a) Transmitter photo IC

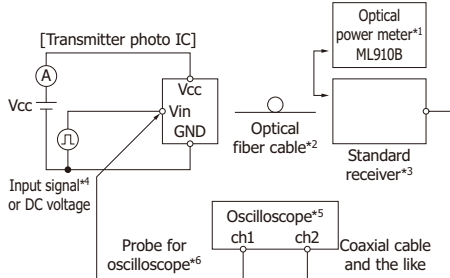

- *1: Anritsu ML910B (MA9802A) or equivalent
- *2: Mitsubishi Chemical GH4001 (POF, 1 m) or equivalent
- *3: Hamamatsu APD module C5668 (fc=1 GHz) or equivalent
- *4: NRZ signal in transmission band (1 Mbps or 10 Mbps)
V(hi) ≥ 2.0 V, V(lo) ≤ 0.4 V, tr, tf ≤ 1 ns
- *5: Frequency bandwidth of 400 MHz or higher
- *6: 1 MHz, 1 pF or lower

KPIC0351EB

(b) Receiver photo IC

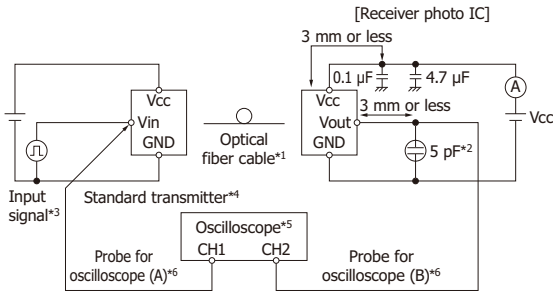

- *1: Mitsubishi Rayon GH4001 (POF, 1 m) or equivalent
- *2: Includes parasitic capacitance such as a probe connector evaluation circuit
- *3: NRZ signal in the transmission band (1 Mbps or 10 Mbps)
V(hi) ≥ 2.0 V, V(lo) ≤ 0.4 V, tr, tf ≤ 1 ns
- *4: Performance as shown in the table below

Parameter	Symbol	Typical value
Rise time	tr	1 ns
Fall time	tf	1 ns
Pulse width distortion	ΔT	-0.5 ns
Jitter	Δtj	-0.5 ns or less


- *5: Frequency bandwidth of 400 MHz or higher
- *6: 1 MHz, 1 pF or lower

KPIC0352EA

5. Characteristics


[Figure 5-1] Directivity (typical example)

(a) Transmitter photo IC

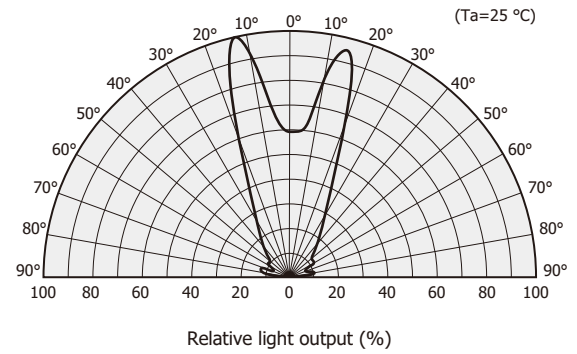

KPICB0259EA


(b) Receiver photo IC

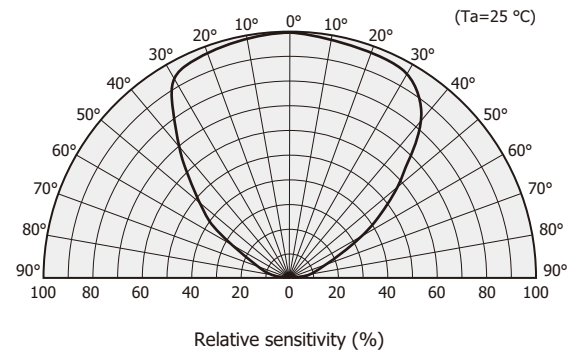

KPICB0260EA


[Figure 5-2] Fiber coupling efficiency (typical example)

(a) Transmitter photo IC

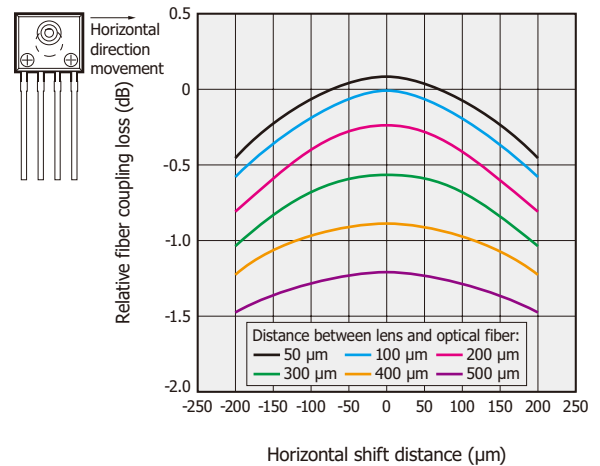


KPICB0261EA

(b) Receiver photo IC

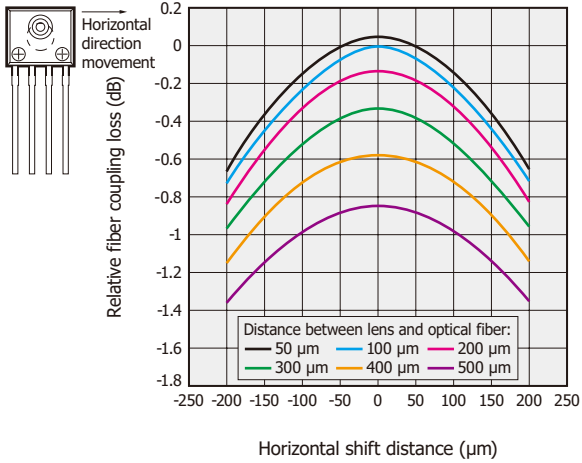

KPICB0262EA


(c) Rise time

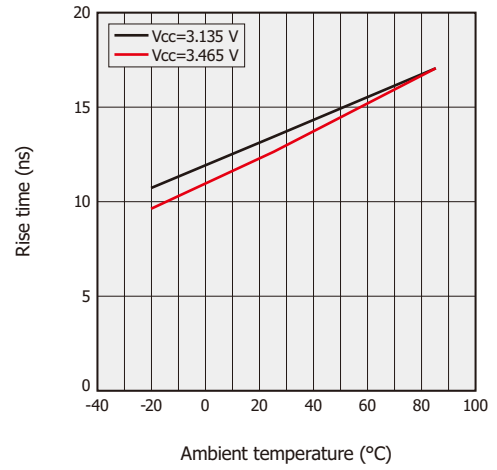

KPICB0265EB


[Figure 5-3] Temperature characteristics (transmitter photo IC: L12422-01SR, typical example)

(a) Fiber-coupled optical output power

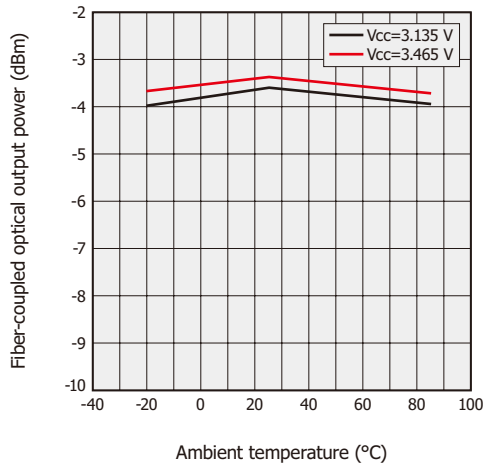


KPICB0263EB

(d) Fall time

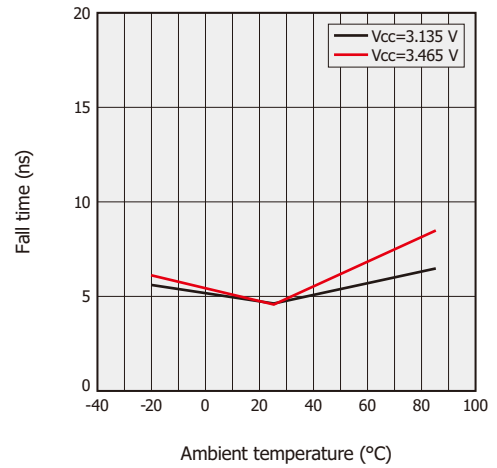


KPICB0266EB

(b) Current consumption

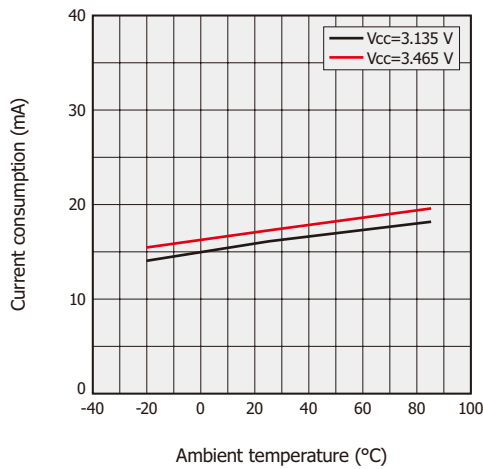

KPICB0264EB


(e) Pulse width distortion

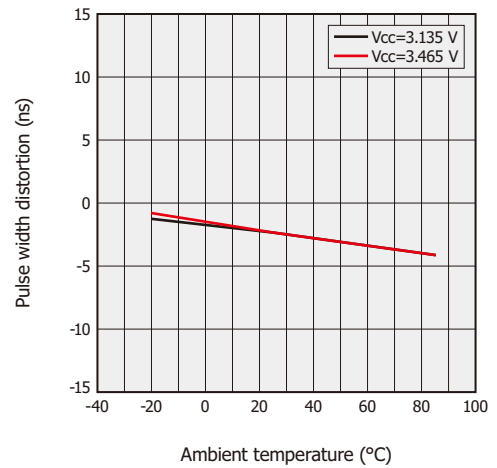

KPICB0267EB


[Figure 5-4] Temperature characteristics
(transmitter photo IC: L12557-01SR, typical example)

(a) Fiber-coupled optical output power

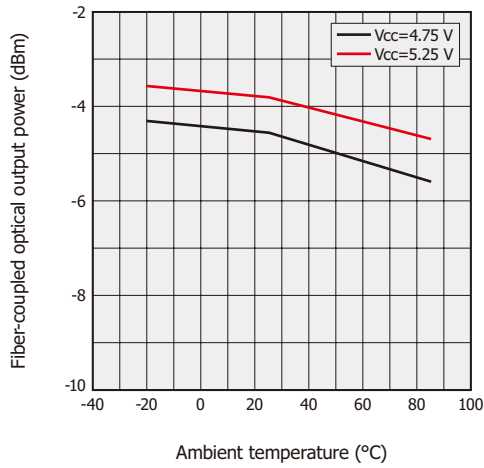


KPICB0328EA

(b) Current consumption

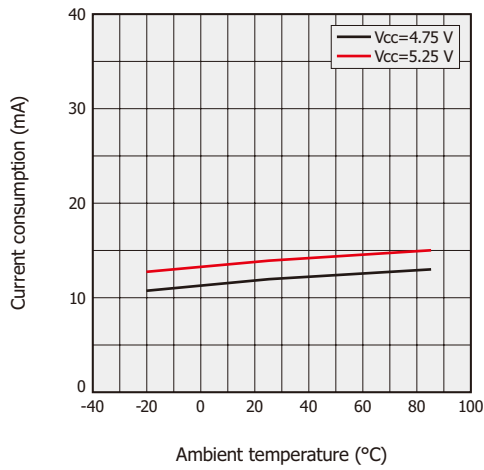


KPICB0329EA

(c) Rise time

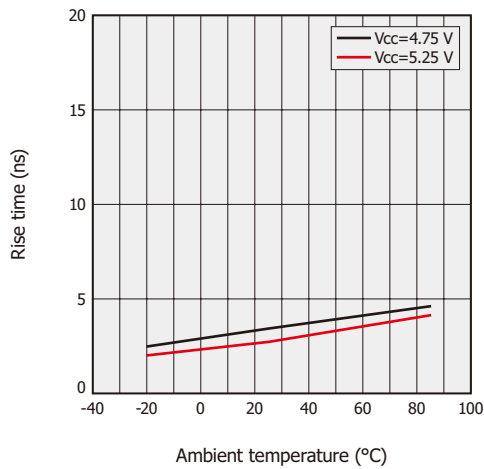


KPICB0330EA

(d) Fall time

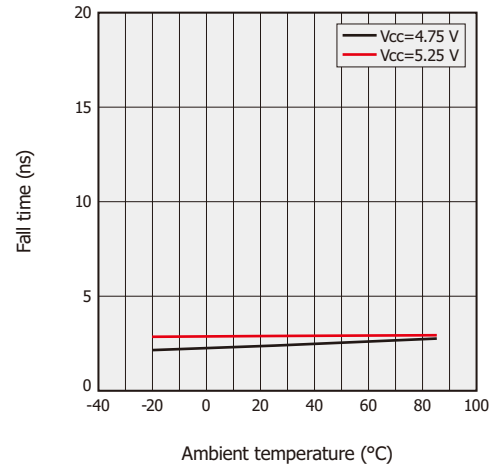

KPICB0331EA


(e) Pulse width distortion

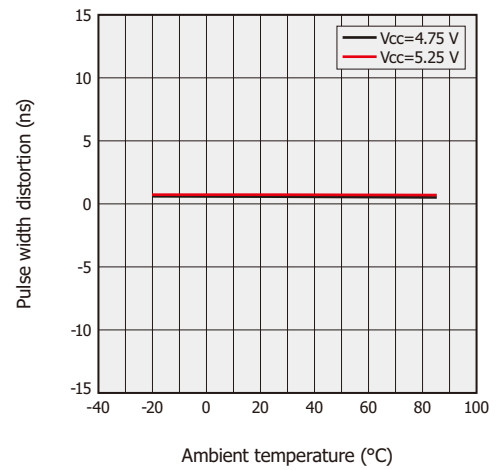

KPICB0332EA


[Figure 5-5] Temperature characteristics
(receiver photo IC: S12512-01SR, typical example)

(a) Current consumption

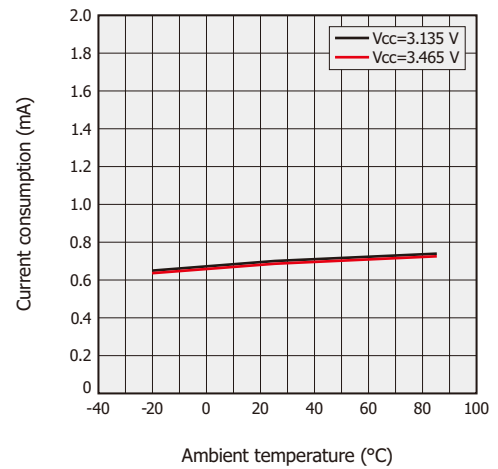


KPICB0268EA

(b) High level output voltage

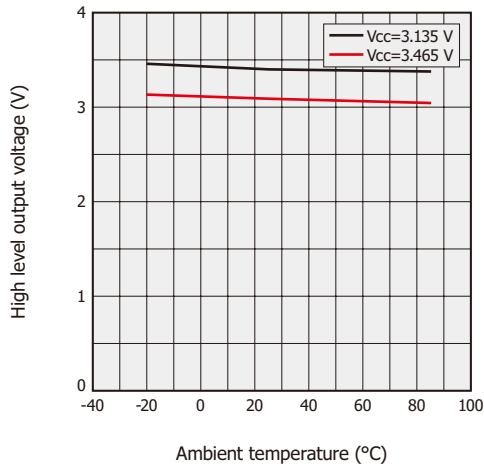


KPICB0269EA

(e) Pulse width distortion (Pin=0 dBm)

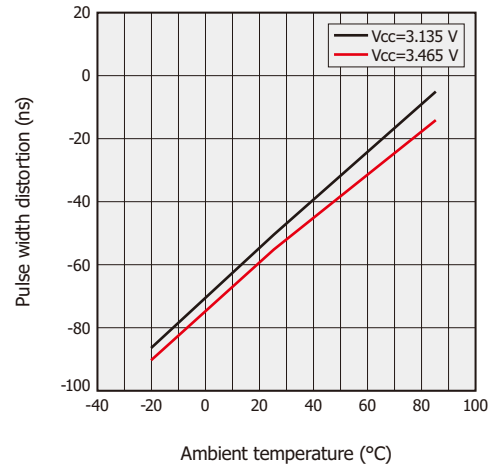


KPICB0272EB

(c) Low level output voltage

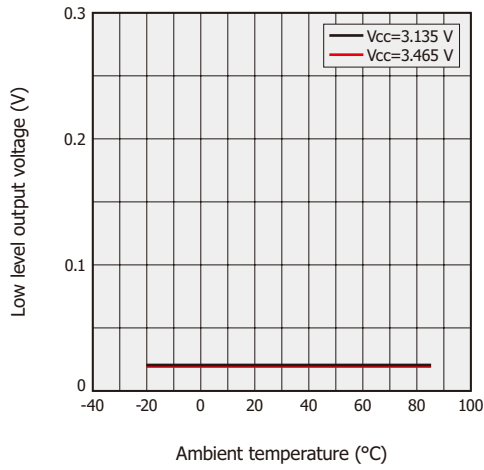


KPICB0270EA

(f) Pulse width distortion (Pin=-25 dBm)

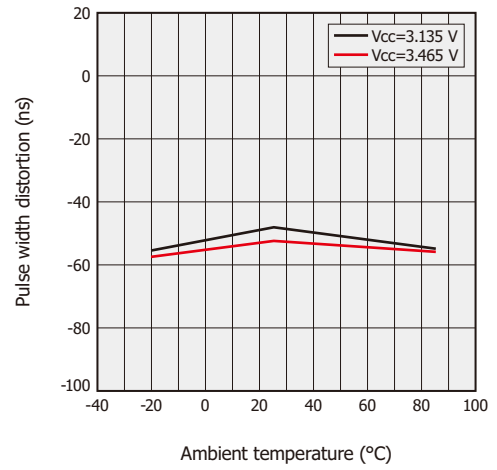


KPICB0273EB

(d) Rise and fall times

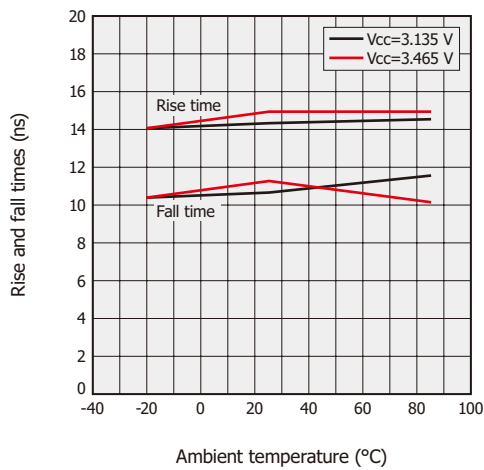


KPICB0271EB

(g) Jitter (Pin=0 dBm)

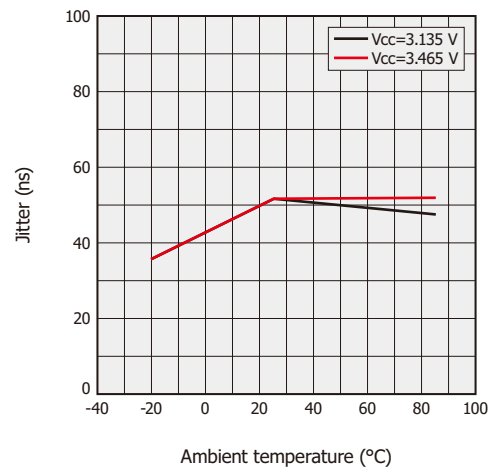


KPICB0274EA

(h) Jitter (Pin=-25 dBm)

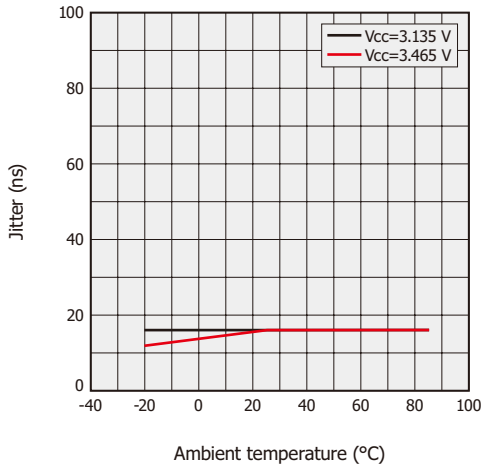

KPICB0275EA


(c) Low level output voltage

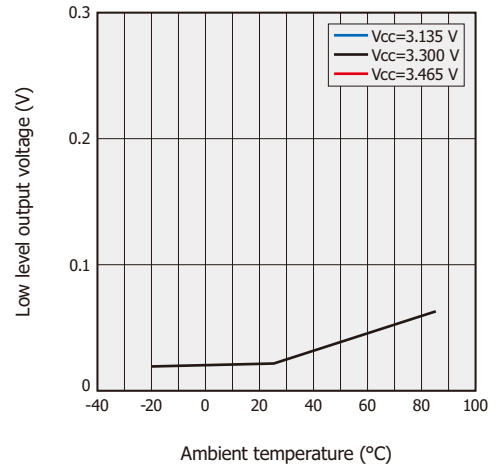

KPICB0278EB


[Figure 5-6] Temperature characteristics
(receiver photo IC: S13174-01SR, typical example)

(a) Current consumption

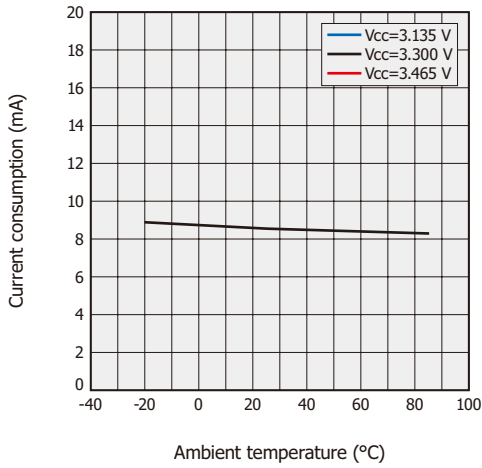


KPICB0276EA

(d) Rise and fall times

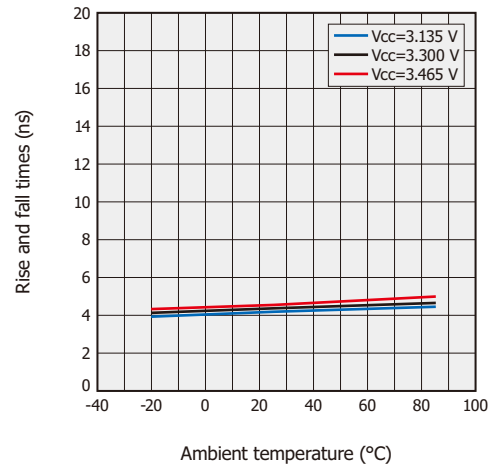


KPICB0279EA

(b) High level output voltage

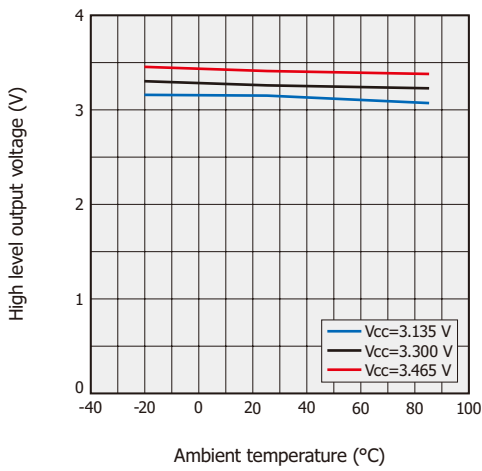


KPICB0277EA

(e) Pulse width distortion (Pin=0 dBm)

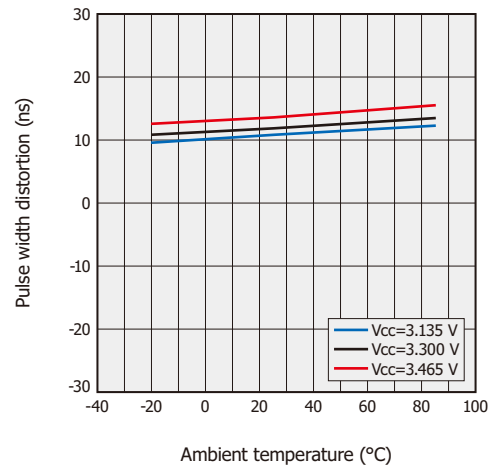


KPICB0280EA

(f) Pulse width distortion (Pin=-24 dBm)

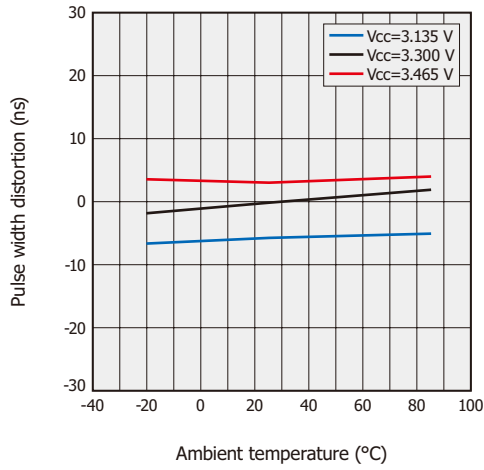


KPICB0281EA

(g) Jitter (Pin=0 dBm)

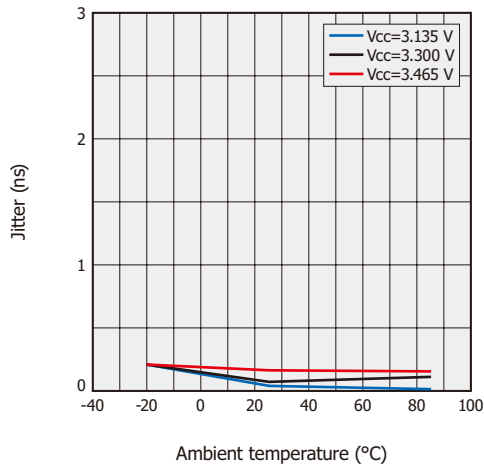

KPICB0282EA


(h) Jitter (Pin=-24 dBm)

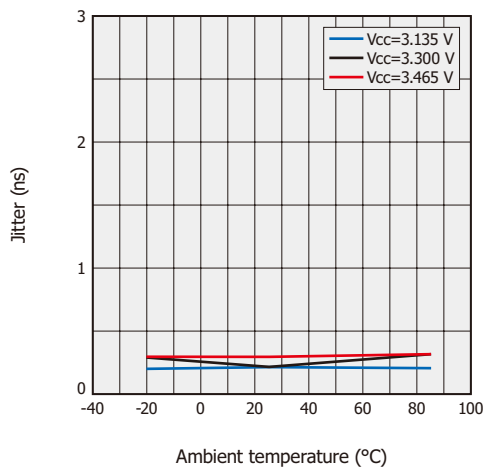

KPICB0283EA


[Figure 5-7] Temperature characteristics (S12423-01SR, typical example)

(a) Current consumption

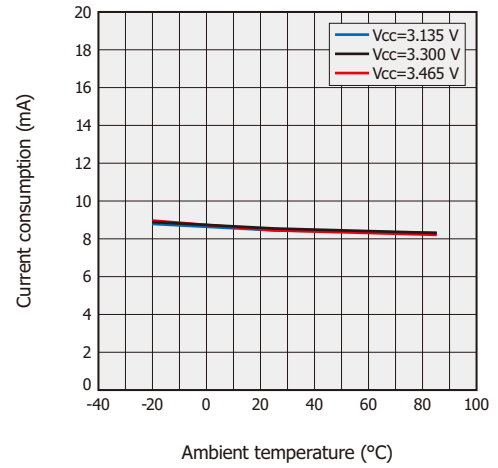


KPICB0333EA

(b) High level output voltage

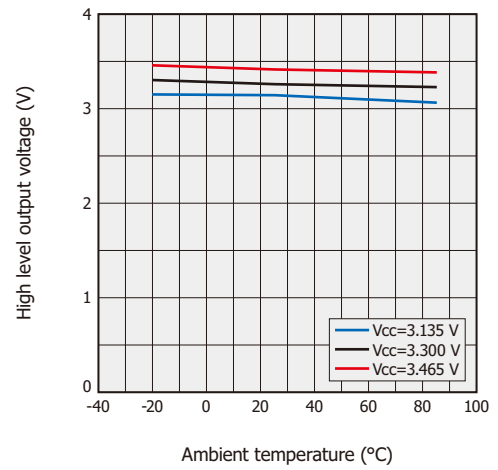


KPICB0334EA

(c) Low level output voltage

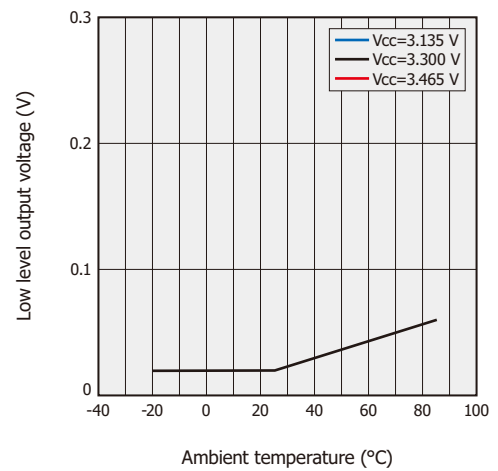


KPICB0335EA

(d) Rise time

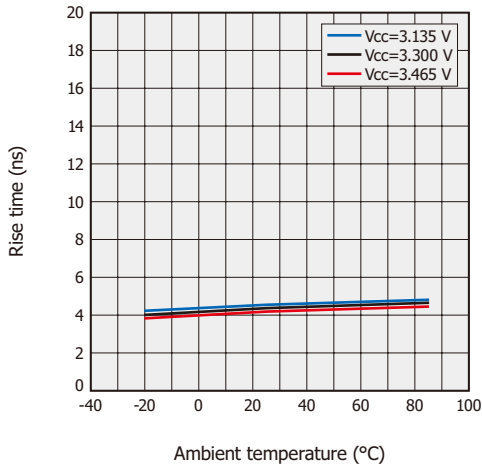


KPICB0336EA

(g) Pulse width distortion (Pin=-20 dBm)

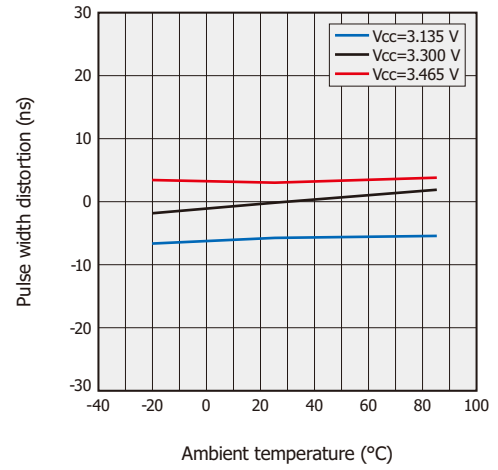


KPICB0339EA

(e) Fall time

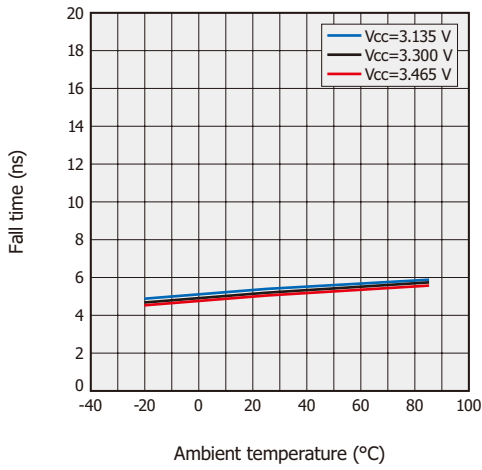


KPICB0337EA

(h) Jitter (Pin=-2 dBm)

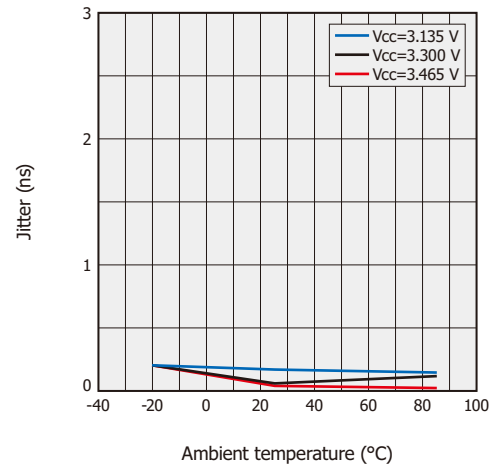


KPICB0340EA

(f) Pulse width distortion (Pin=-2 dBm)

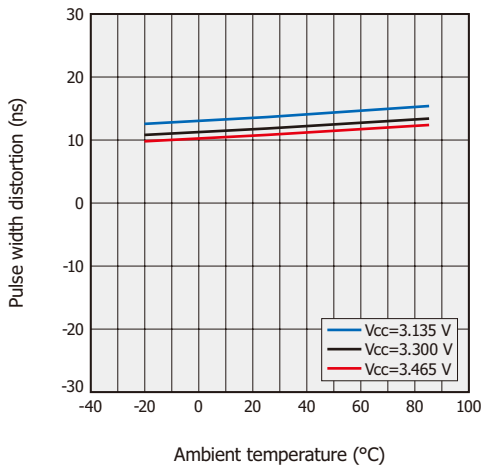

KPICB0338EA

(i) Jitter (Pin=-20 dBm)

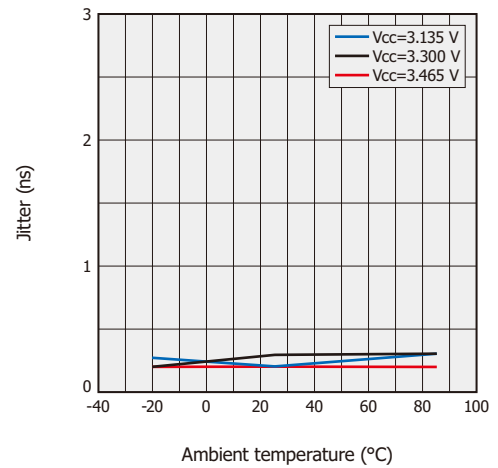

KPICB0341EA

6. Q&A

(1) The power supply voltage is 3.3 V. Can I use it with 5 V?

It cannot be used with 5 V (cannot withstand 5 V).

(2) The transmitter photo IC has two GND terminals, and the receiver photo IC has two Vcc terminals. Explain the connection for the two terminals.

Each of the two terminals is connected inside the package, so it is only necessary to connect one of the terminals to GND or Vcc.

(3) What is the packing state?

100 pieces per tray.


(4) What kind of problems will there be if there is a poor connection with the fiber?

Light output from the transmitter photo IC may decrease, and the sensitivity of the receiver photo IC may decrease.

(5) Explain the power budget.

It is necessary to consider attenuation for each component [Figure 6-1].

[Figure 6-1] Power budget example

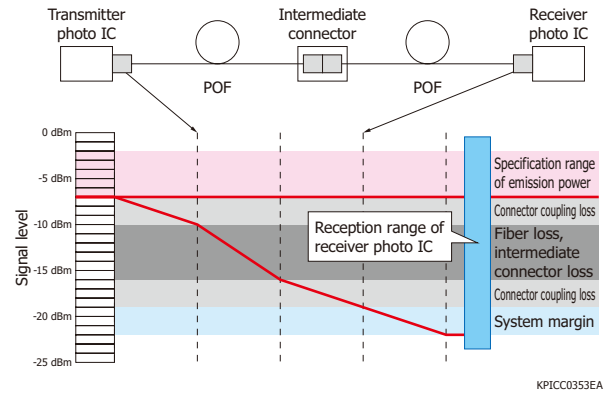

KPIC0353EA

Information described in this material is current as of October 2021.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218, E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20044 Aresè (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41, E-mail: info@hamamatsu.it

China: Hamamatsu Photonics (China) Co., Ltd.: 1201 Tower B, Jiaming Center, 27 Dongsanhuan Bellu, Chaoyang District, 100020 Beijing, P.R.China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866, E-mail: hpc@hamamatsu.com.cn

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No. 158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081, E-mail: info@hamamatsu.com.tw

Cat. No. KPIC9012E01 Oct. 2021 DN