

The H11870 series is a wide sensitive area photon counting head device containing a 25 mm (1") diameter head-on photomultiplier tube, a high-voltage power supply circuit and a photon counting circuit. The high voltage supply for photomultiplier tube and the discrimination level are preset to optimum values, allowing photon counting measurement by just connecting a +5 V supply. The H11870 series has a function of over light detection output for indicating the excessive light operating condition. A mount flange (E6264) is provided as an option for easy installation to measurement equipment.



SPECIFICATIONS

(at +25 °C)

Parameter			H11870-01	H11870-02	H11870-03	H11870-09	Unit	
Input voltage			+4.75 to +5.25				V	
Max. input voltage			+6				V	
Max. input current			100				mA	
Effective area			φ22			φ21	mm	
Spectral response			300 to 650		300 to 850	185 to 320	nm	
Peak sensitivity wavelength			375	420	420	240	nm	
Count sensitivity	200 nm	Typ.	—	—	—	3.0×10^4	s ⁻¹ ·pW ⁻¹	
	300 nm	Typ.	1.4×10^5	2.3×10^5	2.1×10^5	1.2×10^4		
	400 nm	Typ.	2.7×10^5	4.1×10^5	2.5×10^5	8.0×10^0		
	500 nm	Typ.	1.7×10^5	3.4×10^5	2.0×10^5	—		
	600 nm	Typ.	4.6×10^4	5.7×10^4	1.3×10^5	—		
Count linearity *1			6.0 × 10 ⁶				s ⁻¹	
Dark count *2			Typ.	15	60	5000	15	s ⁻¹
			Max.	80	300	15000	30	
Pulse-pair resolution			18				ns	
Output pulse width			9				ns	
Output pulse height	50 Ω load	Min.	+2.0				V	
		Typ.	+2.2					
	Un-terminated	Min.	+4.0					
			Typ.				+4.4	
Recommended load resistance			50				Ω	
Signal output logic			Positive logic				—	
Over light detection output *3	High level	Min.	+3.5				V	
	Low level	Max.	+0.5					
Operating ambient temperature *4			+5 to +40				°C	
Storage temperature *4			-20 to +50				°C	
Weight			140			126	g	

*1: Random pulse, at 10 % count loss

*2: After 30 min storage in darkness


*3: Load resistance 10 kΩ

*4: No condensation


H11870 series can't be used at vacuum environment or reduced pressure environment.

Figure 1: Count sensitivity

●H11870-01/-02/-03

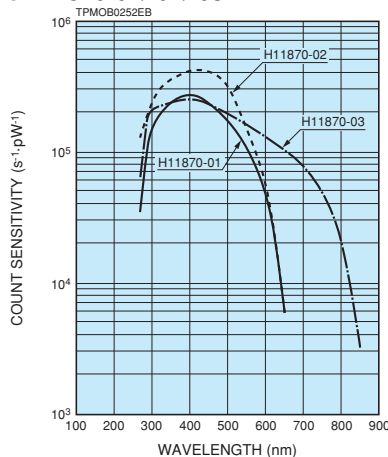

●H11870-09

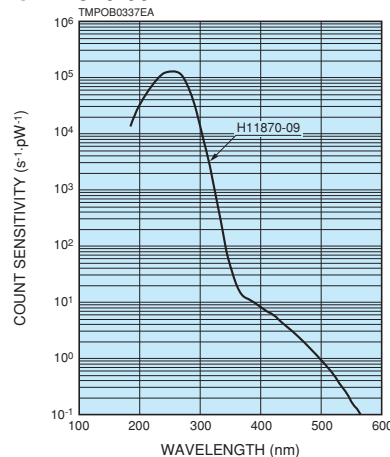

PHOTON COUNTING HEAD H11870 SERIES

Figure 2: Dark count

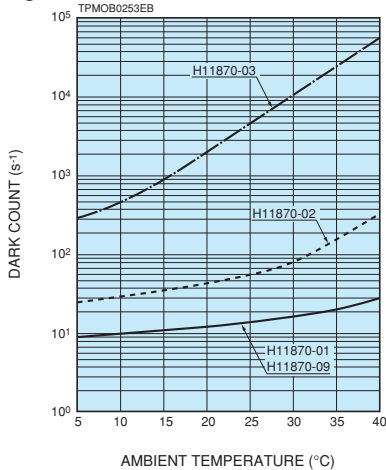


Figure 3: Output waveform

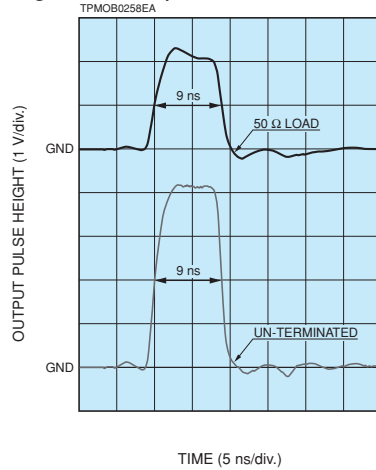


Figure 4: Count rate linearity and over light detection output

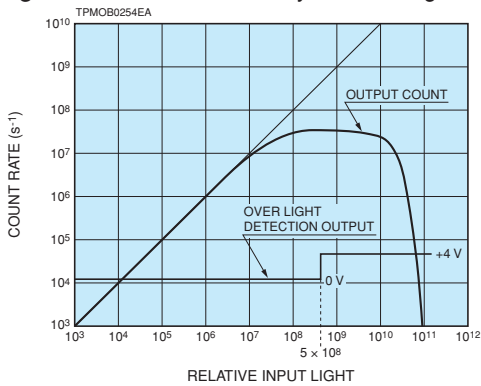


Figure 5: Count rate linearity correction

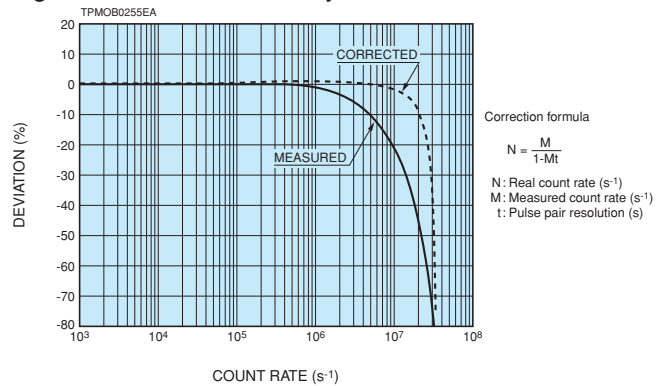


Figure 6: Block diagram


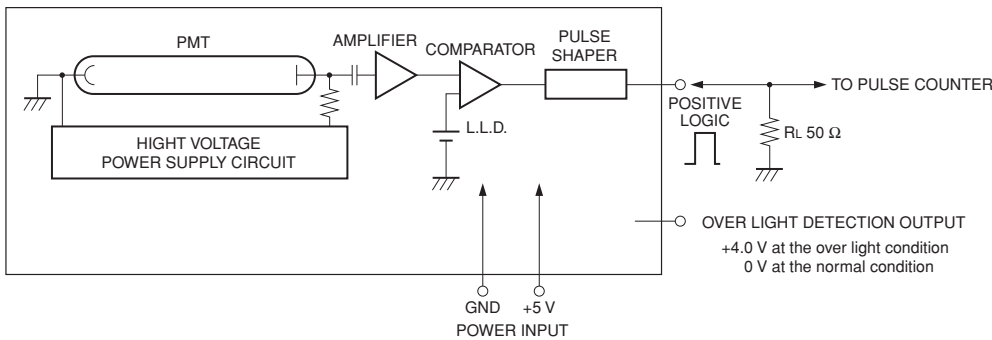


Figure 7: Dimensional outlines (Unit: mm)

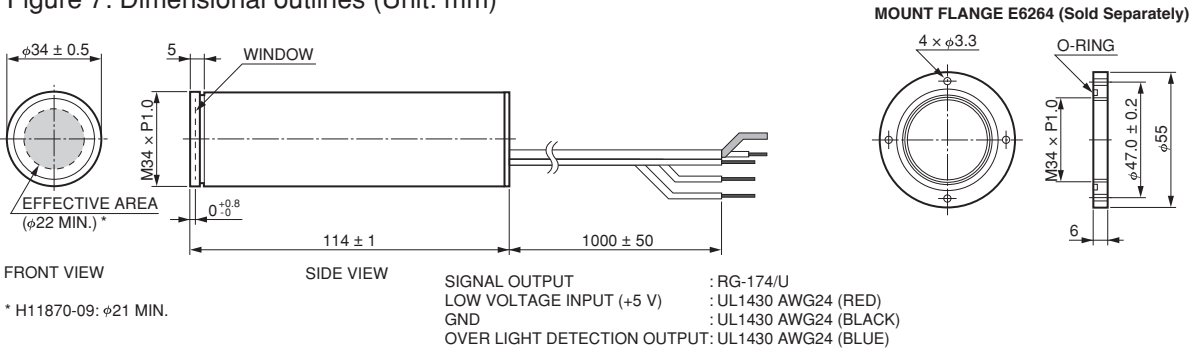

HAMAMATSU PHOTONICS K.K. www.hamamatsu.com

Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: HAMAMATSU CORPORATION: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com
 Germany: HAMAMATSU PHOTONICS DEUTSCHLAND GMBH.: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: info@hamamatsu.de
 France: HAMAMATSU PHOTONICS FRANCE S.A.R.L.: 19, Rue du Saule Traipu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: info@hamamatsu.fr
 United Kingdom: HAMAMATSU PHOTONICS UK LIMITED: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk
 North Europe: HAMAMATSU PHOTONICS NORDEN AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01 E-mail: info@hamamatsu.se
 Italy: HAMAMATSU PHOTONICS ITALIA S.R.L.: Strada della Moia, 1 int. 6, 20044 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: info@hamamatsu.it
 China: HAMAMATSU PHOTONICS (CHINA) CO., LTD.: 1201 Tower B, Jianning Center, 27 Dongsanhuan Bellu, Chaoyang District, 100020 Beijing, P.R. China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn
 Taiwan: HAMAMATSU PHOTONICS TAIWAN CO., LTD.: 8F-3, No.158, Section 2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: info@hamamatsu.com.tw