

FEATURES

- High sensitivity
- Low noise
- Compact
- For photon counting: R3550P-600
- High reliability for shock and vibration

APPLICATIONS

- Chemiluminescence measurement
- Bioluminescence measurement
- Low level light detection
- Radiation measurement



Left: R3550A-600, Right: R3550P-600

SPECIFICATIONS

GENERAL

Parameter		Description	Unit
Spectral response		300 to 650	nm
Wavelength of maximum response		375	nm
Photocathode	Material	Low noise super bialkali	—
	Minimum effective area	φ22	mm
Window material		Borosilicate glass	—
Dynode	Structure	Circular and linear-focused	—
	Number of stages	10	—
Base		14 pin glass base	—
Suitable socket		E678-14C (supplied)	—
Operating ambient temperature		-30 to +70	°C
Storage temperature		-80 to +70 (R3550A-600) / -30 to +70 (R3550P-600)	°C

MAXIMUM RATINGS (Absolute maximum values)

Parameter		Value	Unit
Supply voltage	Between anode and cathode	1250	V
	Between anode and last dynode	250	V
Average anode current		0.1	mA

CHARACTERISTICS (at 25 °C)

Parameter		Min.	Typ.	Max.	Unit
Cathode sensitivity	Luminous (2856 K)	60	80	—	μA/lm
	Quantum efficiency at 375 nm	—	33	—	%
	Blue sensitivity index	9	10	—	—
Anode sensitivity	Luminous (2856 K)	50	160	—	A/lm
Gain		—	2.0 × 10 ⁶	—	—
Anode dark current (after 30 min storage in darkness)		—	0.5	4	nA
Anode dark count [Ⓐ]	At 25 °C	—	30	60	s ⁻¹
	At 37 °C	—	50	—	s ⁻¹
Time response	Anode pulse rise time	—	1.5	—	ns
	Electron transit time	—	17	—	ns

NOTE: [Ⓐ] Photon counting type (R3550P-600) only

Anode characteristics are measured with a voltage distribution ratio shown below

STANDARD VOLTAGE DIVIDER AND SUPPLY VOLTAGE

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	P
Ratio	3	1	1	1	1	1	1	1	1	1	1	1

Supply voltage: 1000 V, K: Cathode, Dy: Dynode, P: Anode

ENVIRONMENTAL TESTING

Shock.....1000 m/s², 11 ms, 3 impact shocks per direction (6 directions)

Vibration.....200 m/s², 50 Hz to 2000 Hz, 1 oct per minute, 3 sweeps per axis (3 axes)

PHOTOMULTIPLIER TUBE R3550A-600/R3550P-600

Figure 1: Typical spectral response

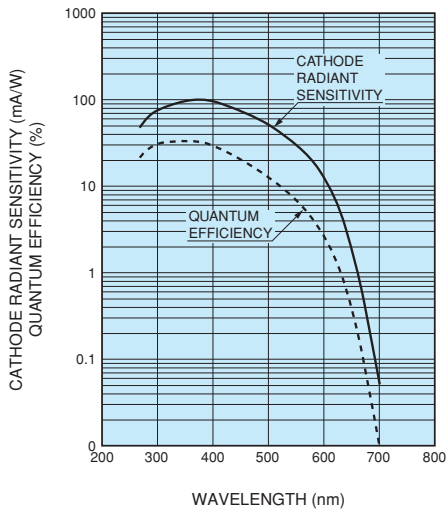


Figure 2: Typical gain and dark current characteristics

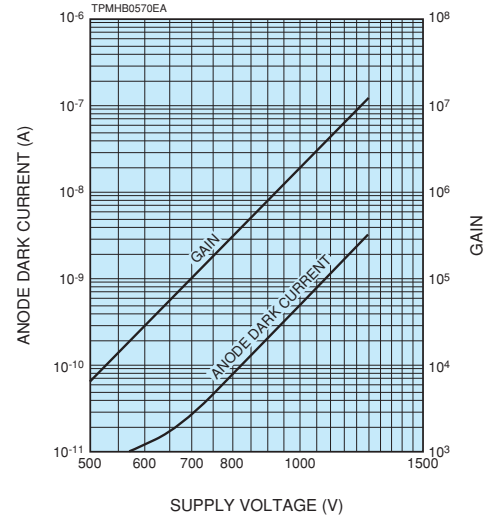


Figure 3: Typical characteristics of dark count (R3550P-600)

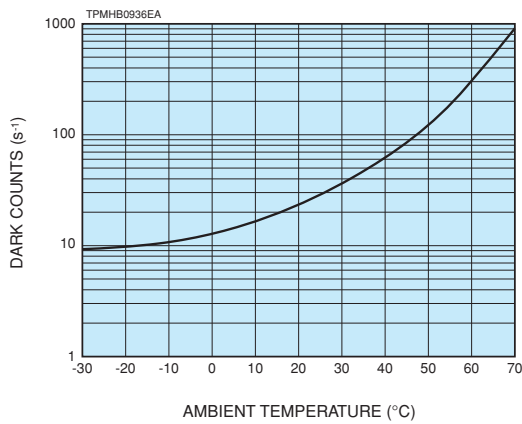


Figure 4: Dimensional outline and basing diagram (Unit: mm)




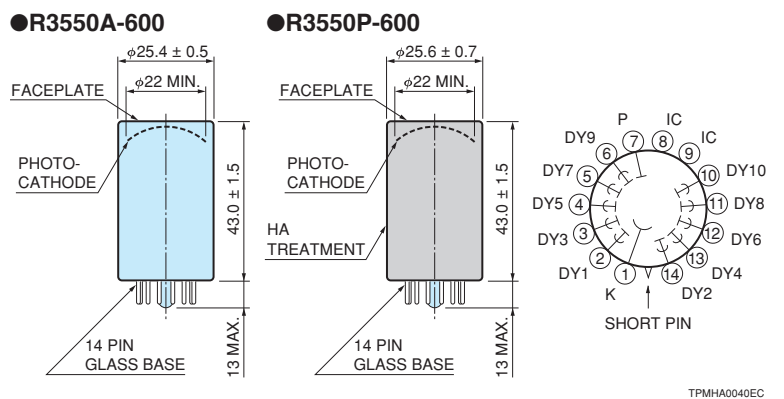


Figure 5: Accessories (Unit: mm)

Socket E678-14C (supplied)

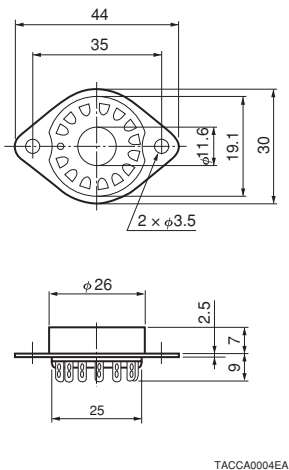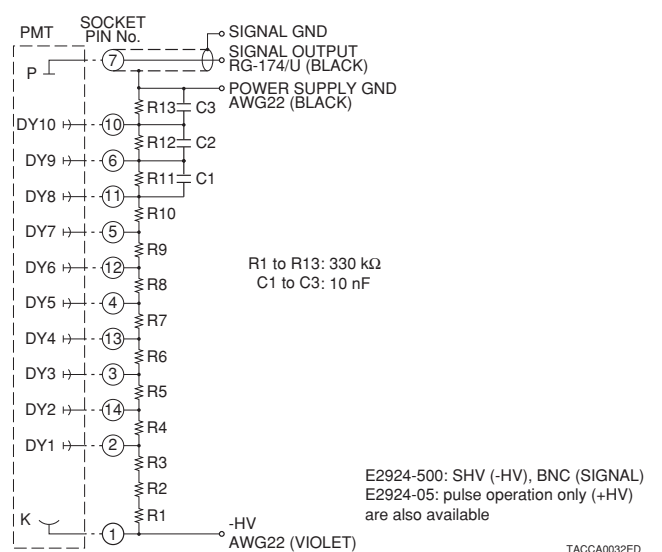

D type socket assembly E2924 (sold separately)

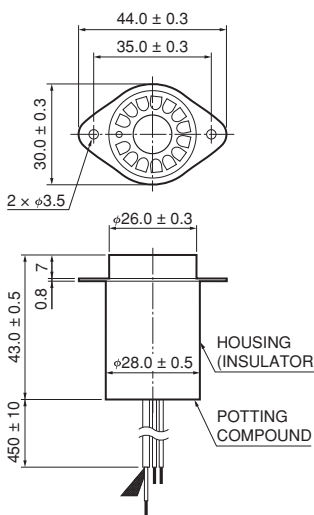

* HAMAMATSU also provides C13890 series and C10940 series compact high voltage power supply modules.

HAMAMATSU PHOTONICS K.K. www.hamamatsu.com

Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: HAMAMATSU CORPORATION: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: HAMAMATSU PHOTONICS DEUTSCHLAND GMBH: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: info@hamamatsu.de

France: HAMAMATSU PHOTONICS FRANCE S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: info@hamamatsu.fr

United Kingdom: HAMAMATSU PHOTONICS UK LIMITED: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: HAMAMATSU PHOTONICS NORDEN AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01 E-mail: info@hamamatsu.se

Italy: HAMAMATSU PHOTONICS ITALIA S.R.L.: Strada della Moia, 1 int. 6, 20044 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: info@hamamatsu.it

China: HAMAMATSU PHOTONICS (CHINA) CO., LTD.: 1201 Tower B, Jiaming Center, 27 Dongsanhuan Bellu, Chaoyang District, 100020 Beijing, P.R. China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn

Taiwan: HAMAMATSU PHOTONICS TAIWAN CO., LTD.: 8F-3, No.158, Section 2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: info@hamamatsu.com.tw

TPMH1384E03
MAR. 2022 IP