

# Infrared detector modules with preamp

Thermoelectrically cooled types



## Easy-to-use detector modules with built-in preamps

Infrared detector modules operate just by connecting to DC power supplies. Low noise thermoelectric cooled types using InGaAs, InAs or InAsSb elements are available. We welcome requests for custom devices that suit your application.

### Features

- High S/N
- Compact size
- Easy to use  
Operates just by connecting to DC power supply
- Circuit design optimized for detector characteristics
- Built-in temperature control circuit (TE-cooled type)

### Applications

- Infrared detection

### Accessories

- 6-conductor cable for TE-cooled type (for DC power supply): 2 m (with one side connector) A4372-07
- Instruction manual

### Structure

Type no.	Detector element	Cooling	Window material	Photosensitive area (mm)	Supply voltage		
					V <sub>CC</sub> * <sup>1</sup> (V)	V <sub>P</sub> * <sup>1</sup> (V)	
C12483-250	InGaAs (G12180-250A)	Two-stage TE-cooled	AR coated (1.55 μm peak) borosilicate glass	φ5	±15 ± 0.5	+2.5 <sup>+0.5</sup> <sub>-0.1</sub>	
C12485-210	InGaAs (G12182-210K)		Borosilicate glass	φ1			
C12486-210	InGaAs (G12183-210K)		Sapphire glass	2 × 2			
C12492-210	InAs (P10090-21)						φ1
C12494-222S	InAsSb (P13243-222MS)						
C12494-210S	InAsSb (P11120-201)						

\*1: V<sub>CC</sub>=power supply for circuit, V<sub>P</sub>=power supply for cooling

**➤ Absolute maximum ratings**

Type no.	Incident light level*2 ( $\mu\text{W}$ )	Supply voltage		Operating temperature*3 Topr ( $^{\circ}\text{C}$ )	Storage temperature*3 Tstg ( $^{\circ}\text{C}$ )
		Vcc (V)	Vp (V)		
C12483-250	0.2	±18	+5	0 to +40	-20 to +50
C12485-210	0.06				
C12486-210	0.07				
C12492-210	2.6				
C12494-222S	14 mW				
C12494-210S	26				

\*2: The value at which the output voltage of each module is maximized when light with the maximum sensitivity wavelength  $\lambda_p$  enters the device. This value does not cause immediate failure.

However, if light that destroys the device ( $1 \text{ W/mm}^2$  for all elements) enters the device, it may cause a drop in product quality.

\*3: No dew condensation

When there is a temperature difference between a product and the surrounding area in high humidity environments, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

**➤ Optical characteristics (Typ. Ta=25 °C, unless otherwise noted)**

Type no.	Chip temperature at rated supply voltage Tchip ( $^{\circ}\text{C}$ )	Peak sensitivity wavelength $\lambda_p$ ( $\mu\text{m}$ )	Cutoff wavelength $\lambda_c$ ( $\mu\text{m}$ )	Photosensitivity*4 S $\lambda=\lambda_p$		Noise equivalent power NEP $\lambda=\lambda_p$	
				Min. (V/W)	Typ. (V/W)	Typ. (W/Hz <sup>1/2</sup> )	Max. (W/Hz <sup>1/2</sup> )
				C12483-250	-15	1.55	1.66
C12485-210	1.95	2.05	$1.1 \times 10^8$	$1.8 \times 10^8$		$1 \times 10^{-13}$	$3 \times 10^{-12}$
C12486-210	2.3	2.56	$1 \times 10^8$	$2 \times 10^8$		$4 \times 10^{-13}$	$6 \times 10^{-12}$
C12492-210	-28	3.25	3.45	$0.8 \times 10^7$	$1 \times 10^7$	$6 \times 10^{-12}$	$1 \times 10^{-11}$
C12494-222S		4.1	5.1	$5 \times 10^2$	$7 \times 10^2$	$8 \times 10^{-10}$	$1.2 \times 10^{-9}$
C12494-210S		4.9	5.9	$5 \times 10^5$	$7.5 \times 10^5$	$1 \times 10^{-10}$	$3 \times 10^{-10}$

\*4: f=100 Hz (C12483-250, C12485-210, C12486-210), f=1.2 kHz (C12492-210, C12494-210S), f=600 Hz (C12494-222S)

**➤ Electrical characteristics (Typ. Ta=25 °C, unless otherwise noted)**

Type no.	Frequency response -3 dB (Hz)			Output impedance  ( $\Omega$ )	Maximum output voltage RL=1 k $\Omega$  (V)	Current consumption*5			
	FCL Typ.	FCH Min. Typ.				Vcc		Vp	
		Max. (mA)	Typ. (mA)			Max. (mA)	Typ. (mA)		
C12483-250	DC	900	1.1 k	50	+10	+30, -22	+50, -30	+500	+1100
C12485-210	DC	1.5 k	2.2 k			+30, -13	+60, -30		
C12486-210	DC	2.1 k	3 k			+30, -14			
C12492-210	5	40 k	50 k		±13	+30, -14	+80, -30	+600	
C12494-222S	DC	750 k	1 M		+10	+30, -20			
C12494-210S	5	80 k	100 k		±13				


\*5: Vcc=±15 V, Vp=2.5 V (C12485-210, C12486-210, C12483-250, C12492-210, C12494-210S/-222S)

Recommended DC power supply (analog power supply): PW18-1.3ATS (TEXIO Technology), E3630A (Keysight Technologies)

Current capacity: More than 1.5 times the maximum current consumption


Ripple noise: 5 mVp-p or less (±15 V, +2.5 V power supply)

**Spectral response**


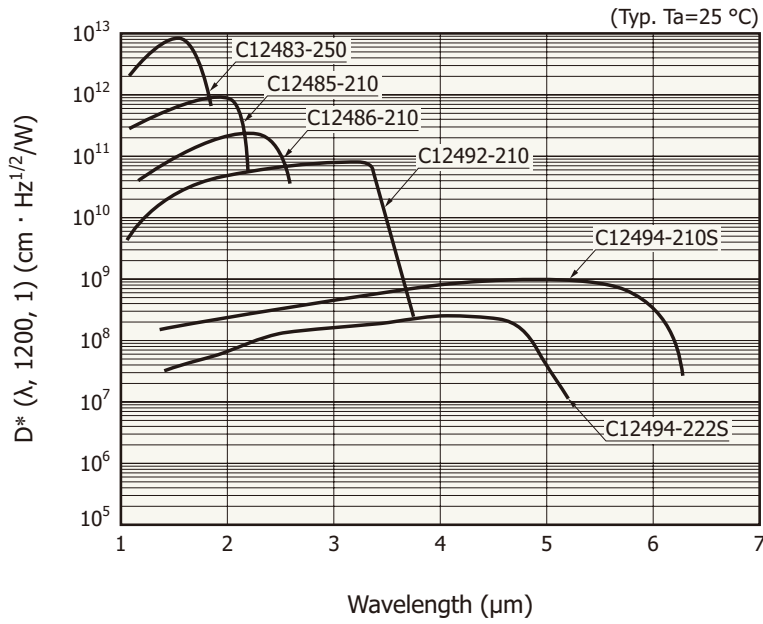


**Dimensional outlines (unit: mm)**

C12485-210, C12486-210, C12483-250, C12492-210, C12494-210S/-222S

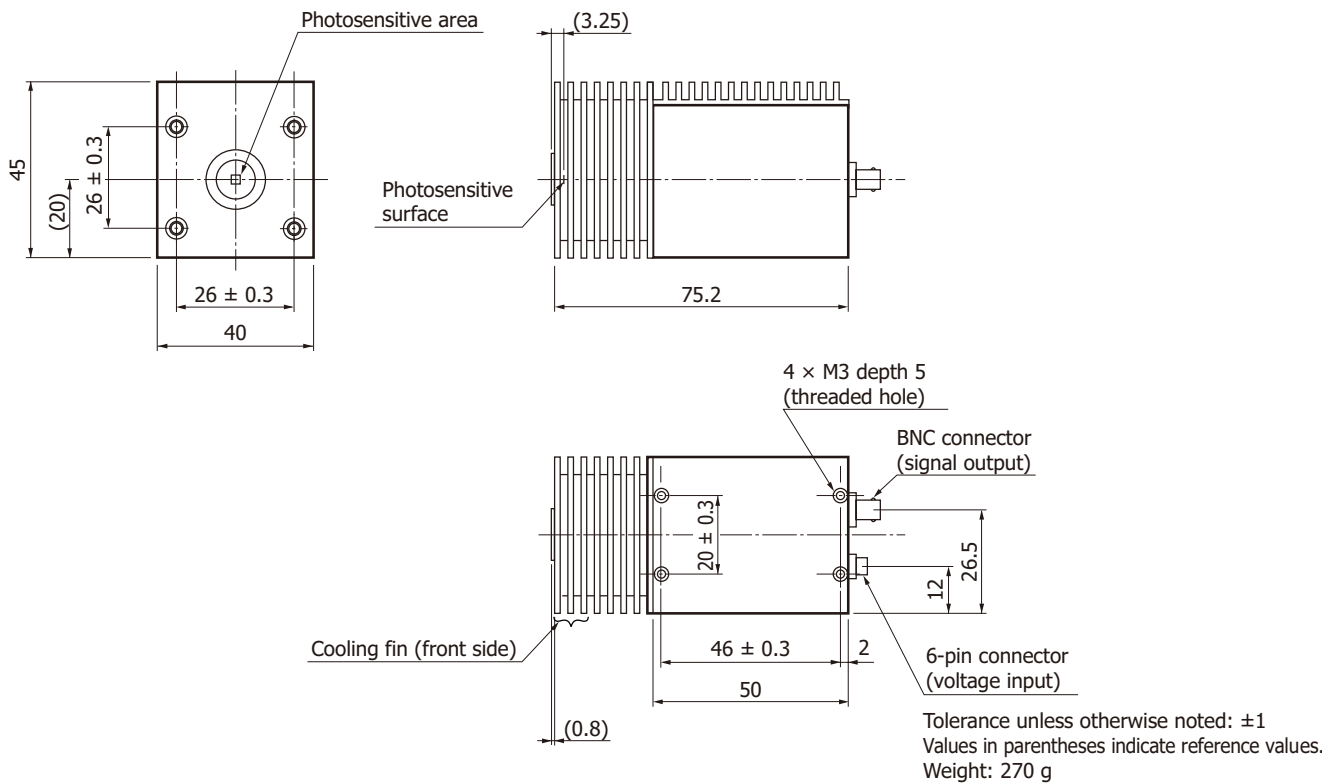

6-conductor cable (for DC power supply) A4372-07

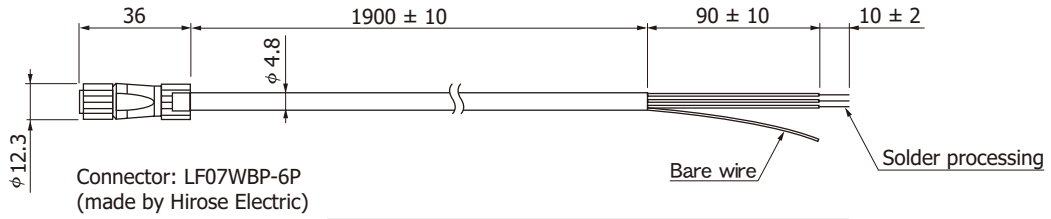

Connector

Pin no.	Pin connection	Lead color
①	+2.5 V Power supply for cooling controller	Red
②	GND Power supply for cooling controller	Blue
③	Output for temperature monitor	Light green
④	+15 V	Yellow
⑤	-15 V	White
⑥	GND	Black

Note: The bare wire is for GND of the case.

Tolerance unless otherwise noted: ±1

KIRD0241EC

### Precautions

- Always use a dual-polarity ±15 V or ±2.5 V power supply to operate this detector. Never use a single-polarity power supply. Using a single-polarity power supply may cause the amplifier in the detector module to break down.
- Regarding TE-cooled type, always supply +2.5 V to cool the detector element.
- Be careful not to apply excessive force to the detector surface. Applying excessive force may damage the light input window. Do not directly touch the light input window with bare hands. If dust or dirt gets on the window, wipe it gently using ethyl alcohol.
- Do not drop this product or do not apply excessive shock to it.

### Related information

[www.hamamatsu.com/sp/ssd/doc\\_en.html](http://www.hamamatsu.com/sp/ssd/doc_en.html)

- Precautions
  - Disclaimer
  - Safety consideration / Opto-semiconductors
  - Precautions / Compound opto-semiconductors (photosensors, light emitters)
- Catalogs
  - Selection guide / Infrared detectors
  - Technical note / Compound semiconductor photosensors

Information described in this material is current as of November 2025.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.