


S7105-16

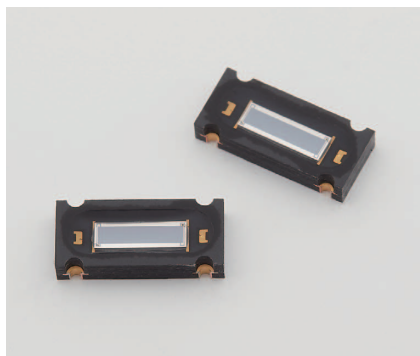

PSD compatible to lead-free reflow soldering

The S7105-16 is a position sensitive detector (PSD) compatible to lead-free reflow soldering. The small and thin leadless package allows reducing the mount area on a printed circuit board.

Features

- Photosensitive area: 1 × 4.2 mm (resistance length: 4.2 mm)
- Compatible lead reflow soldering
- Surface mount type, compact, thin leadless package

Applications

- Distance measuring equipment
- Proximity switches
- Displacement meters

Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	Condition	Value	Unit
Reverse voltage	VR max		20	V
Operating temperature	Topr	No dew condensation*1	-25 to 85	°C
Storage temperature	Tstg	No dew condensation*1	-40 to 100	°C
Reflow soldering conditions	Tsol	JEDEC level 4	Peak temperature: 250 °C, twice (see P.5)	-

*1: When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics (Ta=25 °C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	λ		-	320 to 1100	-	nm
Peak sensitivity wavelength	λ_p		-	960	-	nm
Photosensitivity	S	$\lambda=890$ nm	-	0.55	-	A/W
Interelectrode resistance	Rie	Vb=0.1 V	100	140	180	k Ω
Position detection error*2	-	VR=1 V Light spot size= $\phi 300$ μ m	-	± 15	± 35	μ m
Saturation current*3	Ist	VR=1 V, RL=1 k Ω	30	-	-	μ A
Dark current	ID	VR=1 V	-	0.1	2	nA
Dark current temperature coefficient	ΔTID		-	1.15	-	times/°C
Rise time*4	tr	VR=1 V, RL=1 k Ω $\lambda=890$ nm	-	5	15	μ s
Terminal capacitance	Ct	VR=1 V, f=10 kHz	-	40	80	pF
Position resolution*5	-	*5	-	-	0.1	μ m

*2: In the range 75% from the center of the photosensitive area to the edge


*3: Upper limit of linearity of the photocurrent relative to the total incident light level. Photocurrent at a point 10% deviation from linearity

*4: Time required for output change from 10 to 90% of the steady output value when stepped function light is input to the PSD


*5: Equivalent to the detectable light spot displacement. The detection limit is expressed as a distance on the photosensitive area.

- Photocurrent: 1 μ A
- Frequency bandwidth 1 kHz
- Equivalent input noise voltage of circuit: 1 μ V


Spectral response

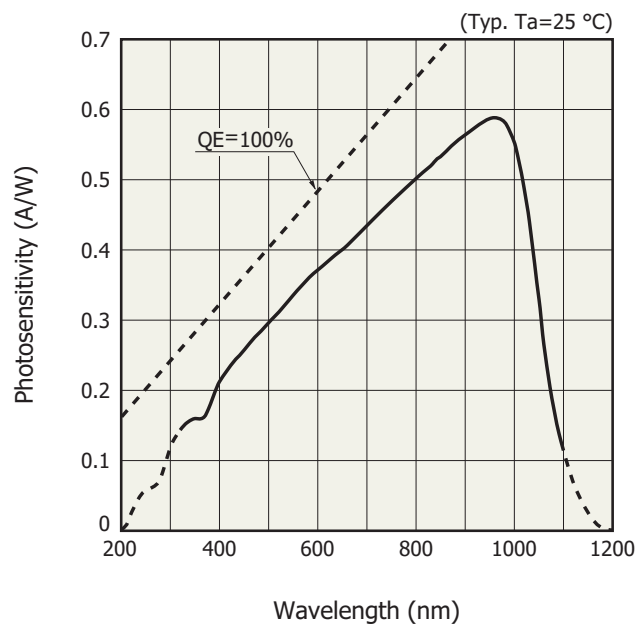


Dark current vs. reverse voltage

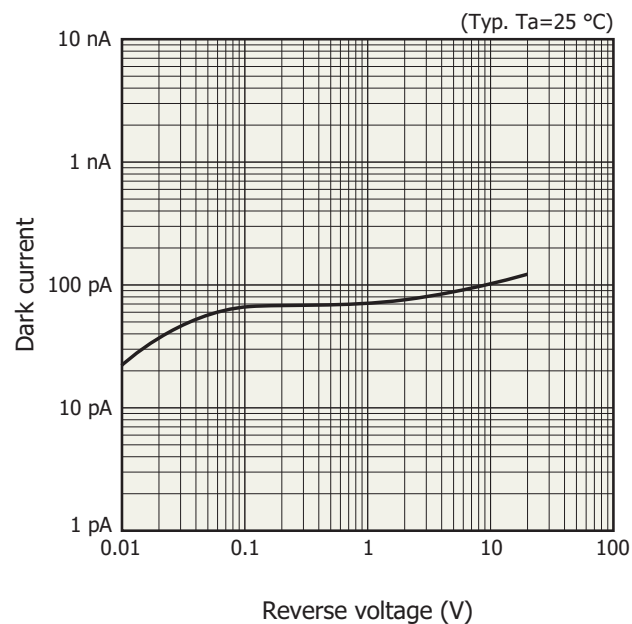

Terminal capacitance vs. reverse voltage

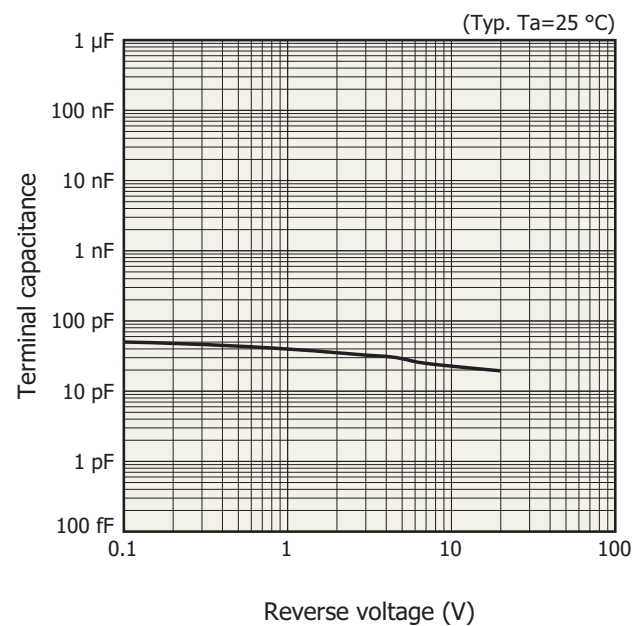

Saturation photocurrent vs. interelectrode resistance

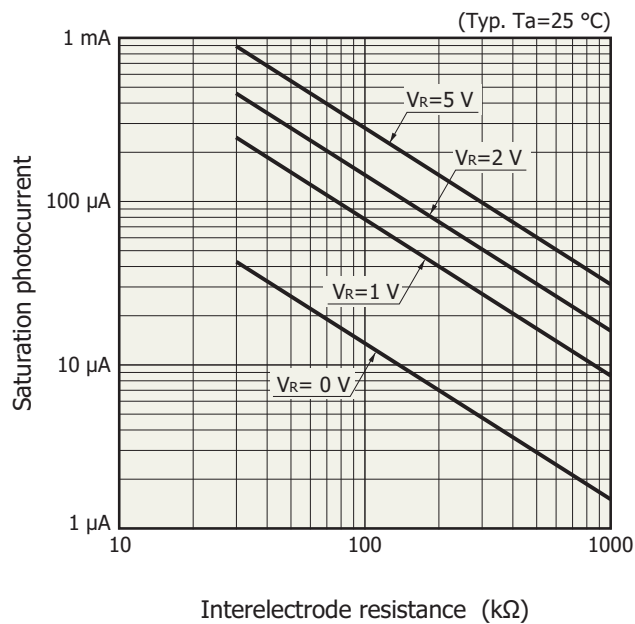


Definition of position detection error

Given the electrical center position to be the incident position that produces $I_1=I_2$, the position detection error at each incident position is defined by the following equation.





$$\text{Position detection error } (\mu\text{m}) = \text{Incident position} - \frac{I_2 - I_1}{I_1 + I_2} \times \frac{L}{2}$$

The value at the incident position assumes that the electrical center position is 0 with the I_1 side as negative and I_2 side as positive.

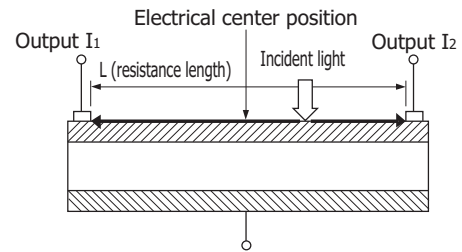

KPSDC0001EB

Dimensional outline (unit: mm)

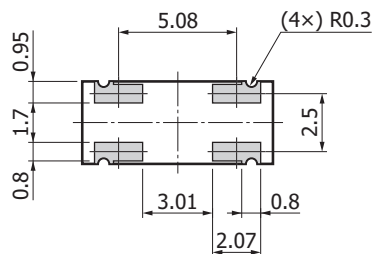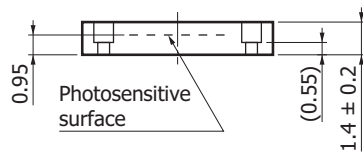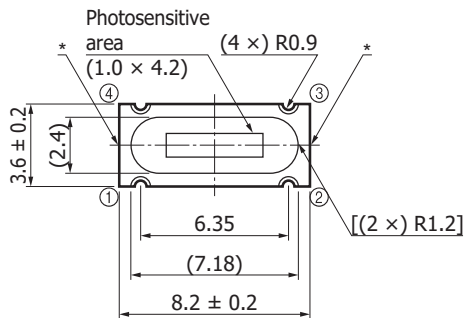


- ① Anode 1
- ② Cathode (common)
- ③ Anode 2
- ④ Cathode (common)

Tolerance unless otherwise noted: ± 0.1
Center position accuracy of photosensitive area:
with respect to package center
 $X, Y \leq \pm 0.2$

* There is exposed wiring on the side of the device.
To prevent short circuits, do not allow any
conductors to come in contact with the device.

KPSDA0065EB

Recommended land pattern (unit: mm)

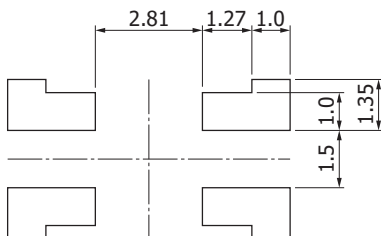


KPSDC0030EA

Standard packing specifications

■ Reel

Dimensions	Hub diameter	Tape width	Material	Electrostatic characteristics
254 mm	100 mm	12 mm	Polystyrene	Conductive

■ Embossed tape (unit: mm, material: polystyrene, conductive)

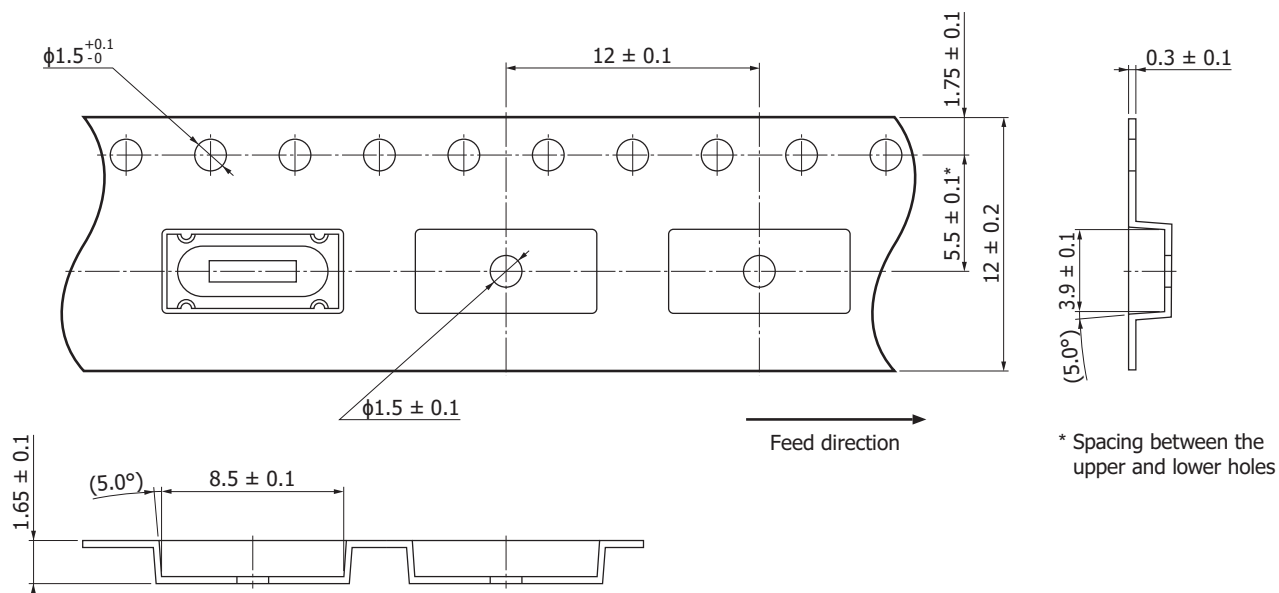

KLEDC0031EB


■ Packing quantity

1000 pcs/reel

■ Packing type

Reel and desiccant in moisture-proof packaging (vacuum-sealed)

Measured example of temperature profile with our hot-air reflow oven for product testing

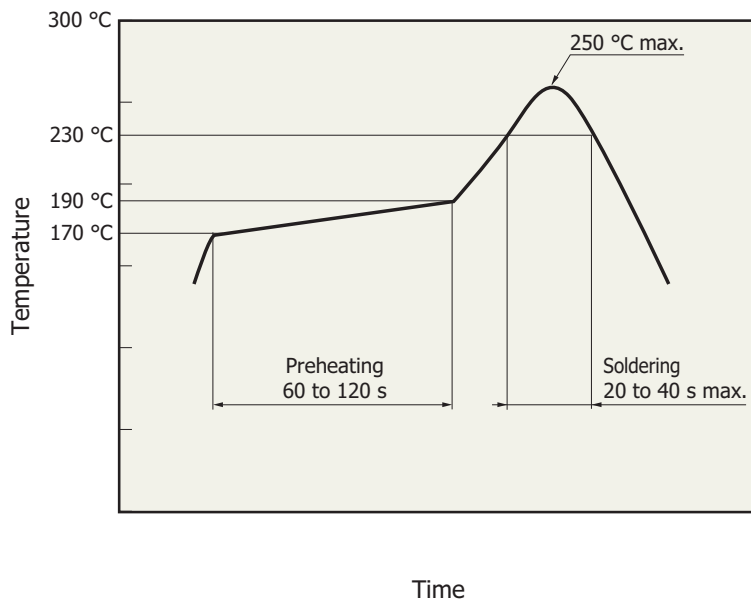

KPSDC0032EA

- This product supports lead-free soldering. After unpacking, store it in an environment at a temperature of 30 °C or less and a humidity of 60% or less, and perform soldering within 72 hours.
- The effect that the product is subject to during reflow soldering varies depending on the circuit board and reflow oven that are used. When you set reflow soldering conditions, check that problems do not occur in the product by testing out the conditions in advance.

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions

- Disclaimer
- Metal, ceramic, plastic packages

■ Technical information

- PSD

The content of this document is current as of September 2017.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39) 02-93581733, Fax: (39) 02-93581741

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866