



L11368 series

High output power LED with mini-lens

This product is an LED with a micro-ball lens bonded to the surface of the high-power LED chip having an internal confined structure. Further, a cap with a mini-lens is used as a seal to make the output beam even narrower. This allows highly efficient input into optical fibers, making the product well suited for optical fiber communications. With the L11368-01 (3 pins), the case can be connected to ground.

Features

- ➔ High light output: 65 μ W typ. ($I_F=50$ mA, GI 50)
- ➔ Cutoff frequency: 50 MHz typ. ($I_F=50$ mA)

Applications

- ➔ Optical fiber communications

Absolute maximum ratings ($T_a=25$ °C)

Parameter	Symbol	Condition	Specification	Unit
Forward current	I_F		60	mA
Reverse voltage	V_R		3	V
Pulse forward current	I_{FM}	Pulse width=10 μ s Duty ratio=50%	100	mA
Power dissipation	P		170	mW
Operating temperature	T_{opr}	No dew condensation*1	-30 to +85	°C
Storage temperature	T_{stg}	No dew condensation*1	-40 to +100	°C
Soldering conditions	-		260 °C or less, within 5 s, at least 1 mm away from lead roots	-

*1: When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.


Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics ($T_a=25$ °C)


Parameter	Symbol	Condition	L11368/-01			Unit
			Min.	Typ.	Max.	
Peak emission wavelength	λ_p	$I_F=50$ mA	850	870	890	nm
Spectral half width	$\Delta\lambda$	$I_F=50$ mA	-	35	50	nm
Forward voltage	V_F	$I_F=50$ mA	-	2.0	2.4	V
Pulse forward voltage	V_{FP}	$I_F=100$ mA	-	2.4	3.6	V
Reverse current	I_R	$V_R=3$ V	-	-	10	μ A
Fiber end output	Pf	$I_F=50$ mA, GI 50	45	65	-	μ W
Cutoff frequency*2	fc	$I_F=50$ mA + 1 mAp-p	35	50	-	MHz

*2: Frequency at which the light output drops by 3 dB relative to the output at 100 kHz


❑ Emission spectrum

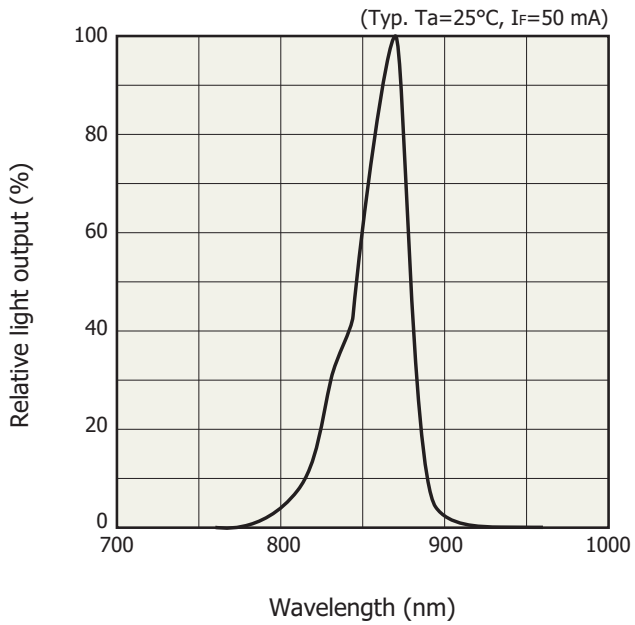


❑ Fiber end output vs. forward current

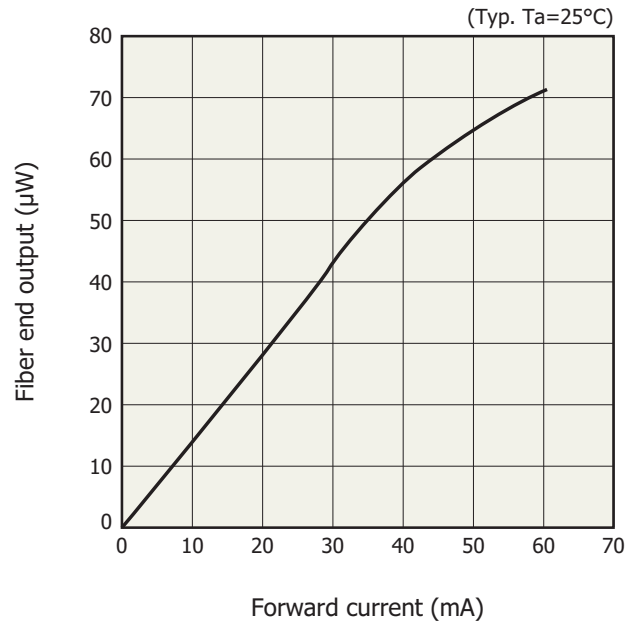

❑ Forward current vs. forward voltage

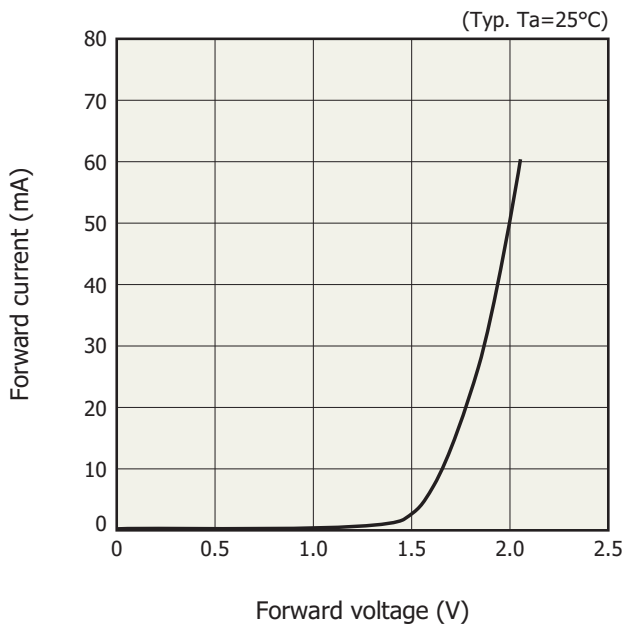


❑ Frequency characteristics

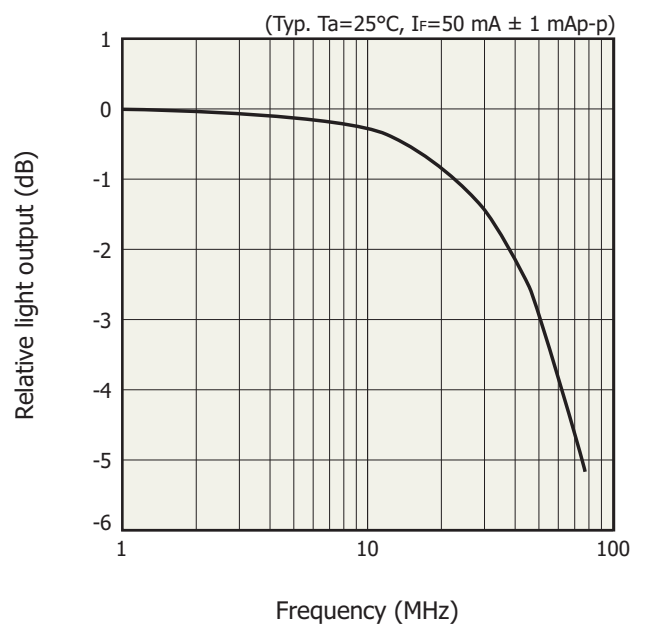


Fiber coupling characteristics (GI 50)


X, Y axes

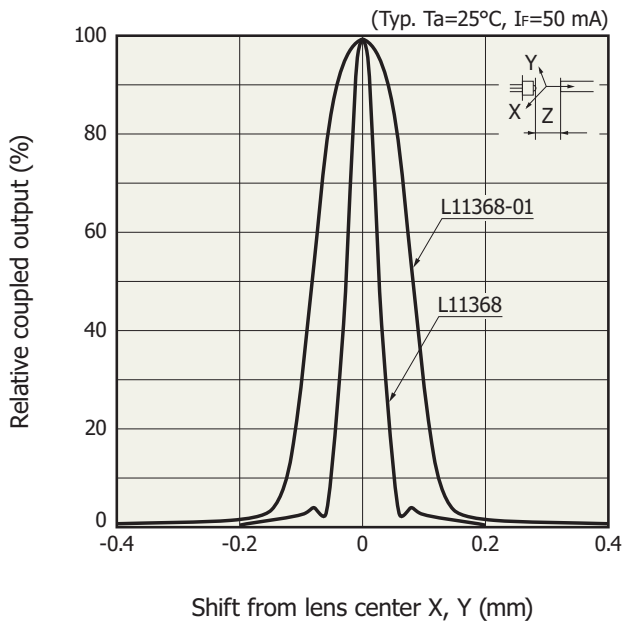


Z axis

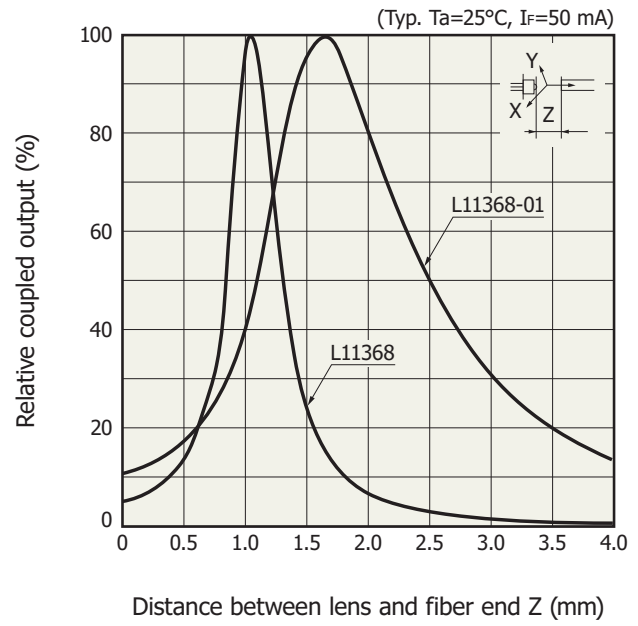


Fiber end output vs. ambient temperature

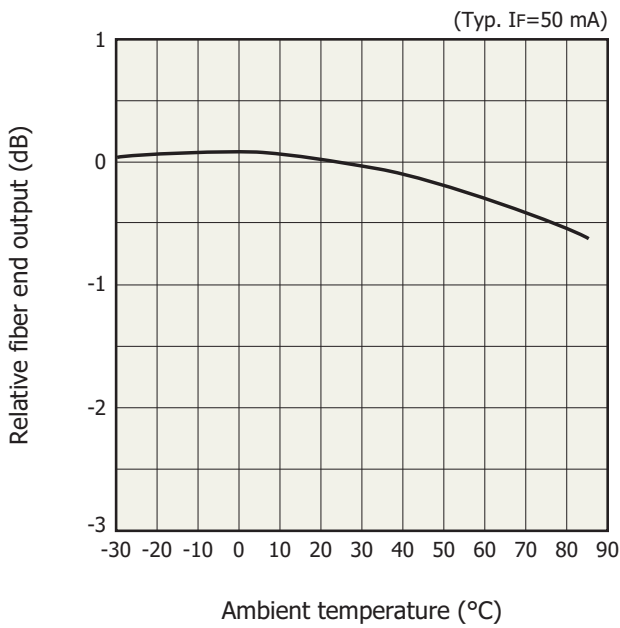

Allowable forward current vs. ambient temperature

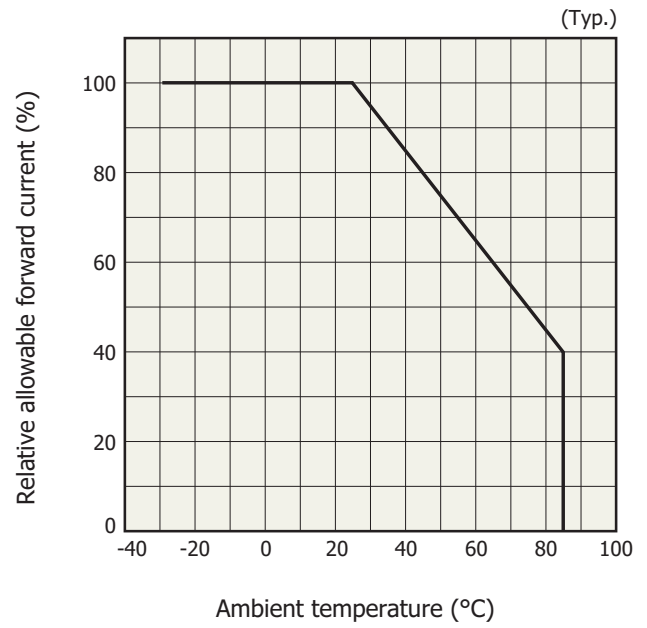


▣ Allowable forward current vs. duty ratio

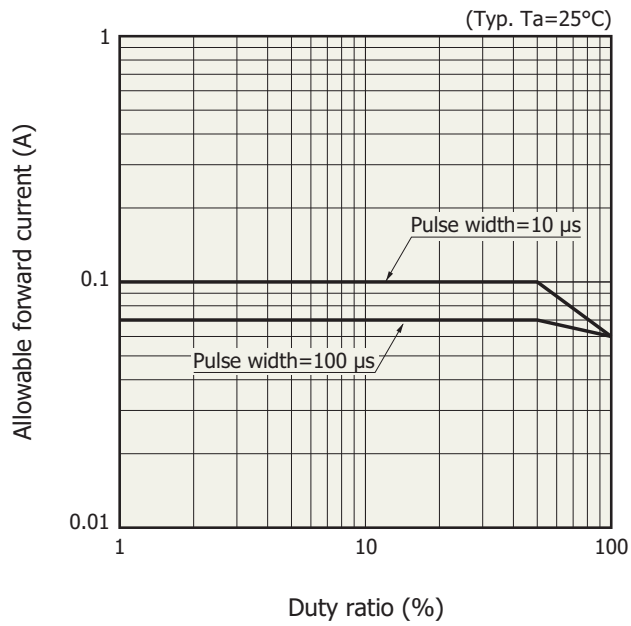


▣ Dimensional outline (unit: mm)

L11368

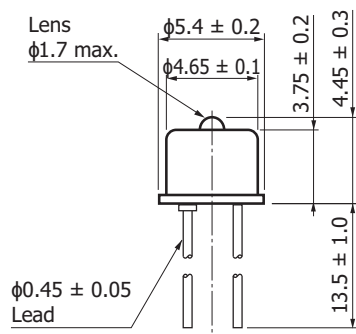

KLEDA0094EA

L11368-01

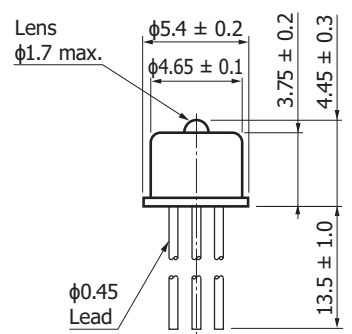

KLEDA0110EA

Standard packing specifications

- Packing state: Paper box (200 pieces/box)

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions

- Disclaimer
- Metal, ceramic, plastic packages

■ Technical information

- LED

Information described in this material is current as of June 2019.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218, E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41, E-mail: info@hamamatsu.it

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R.China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866, E-mail: hpc@hamamatsu.com.cn

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No. 158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081, E-mail: info@hamamatsu.com.tw