


# Si PIN photodiode

S13773

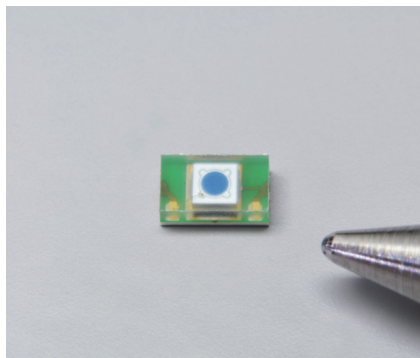

## Surface mount type, high-speed Si photodiode

The S13773 is a Si PIN photodiode with sensitivities in the visible to near infrared range and is compatible with lead-free solder reflow. It features high-speed response and is suitable for distance measurement laser monitoring.

### Features

- ➔ High-speed response: 500 MHz ( $V_R=10\text{ V}$ )
- ➔ Surface mount type
- ➔ High reliability (wide temperature range)

### Applications

- ➔ Distance measurement laser monitor
- ➔ Light monitor (from visible to near infrared region)

### Structure

Parameter	Symbol	Specification	Unit
Photosensitive area	-	$\phi 0.8$	mm
Package	-	$3.1 \times 1.8 \times 1.0$	mm

### Absolute maximum ratings

Parameter	Symbol	Value	Unit
Reverse voltage	$V_R$ max	20	V
Power dissipation	$P_d$	0.2	W
Operating temperature*1	$T_{opr}$	-40 to +100	°C
Storage temperature*1	$T_{stg}$	-40 to +100	°C
Soldering conditions*2	-	Peak temperature: 260 °C (see P.4)	-

\*1: No dew condensation

When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.


\*2: JEDEC level 2a

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

### Electrical and optical characteristics ( $T_a=25\text{ °C}$ )


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	$\lambda$		-	380 to 1000	-	nm
Peak sensitivity wavelength	$\lambda_p$		-	800	-	nm
Photosensitivity	$S$	$\lambda=\lambda_p$	0.5	0.54	-	A/W
Short circuit current	$I_{sc}$	$\lambda=800\text{ nm}, V_R=0\text{ V}$	0.35	0.43	-	A
Dark current	$I_D$	$V_R=10\text{ V}$	-	10	500	pA
Dark current temperature coefficient	$\Delta TID$		-	1.15	-	times/°C
Cutoff frequency	$f_c$	$\lambda=830\text{ nm}, V_R=10\text{ V}$ $R_L=50\ \Omega, -3\text{ dB}$	-	500	-	MHz
Terminal capacitance	$C_t$	$V_R=10\text{ V}, f=10\text{ kHz}$	-	3	4	pF

**Spectral response**

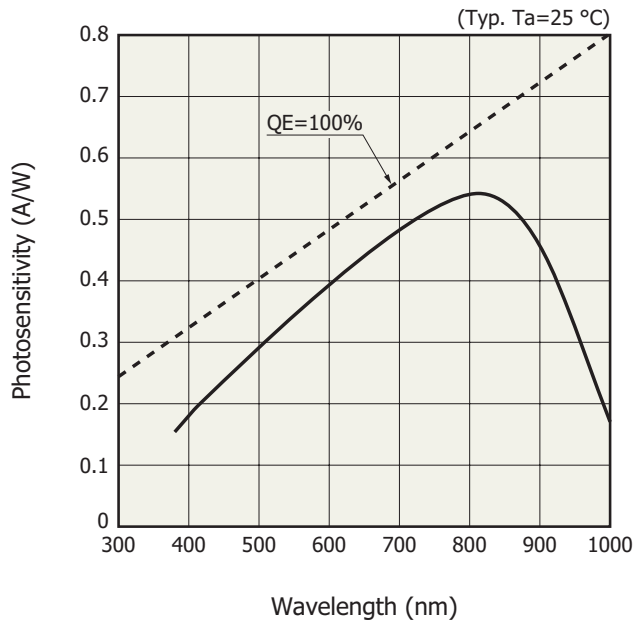


KPINB0406EB

**Photosensitivity temperature characteristics**

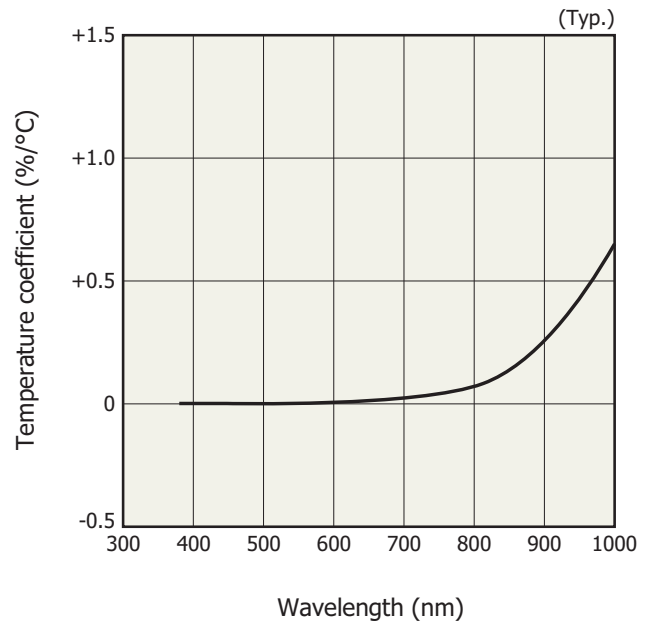


KPINB0407EB

**Photocurrent vs. incident light level**



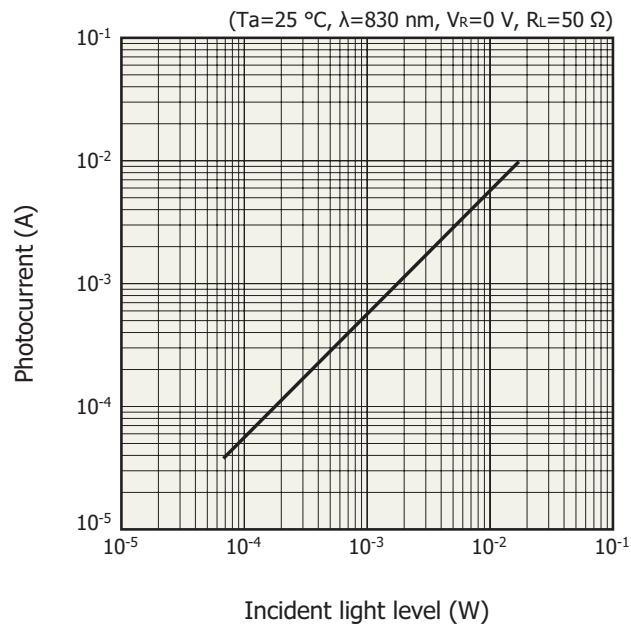


KPINB0408EA



**Frequency characteristics**

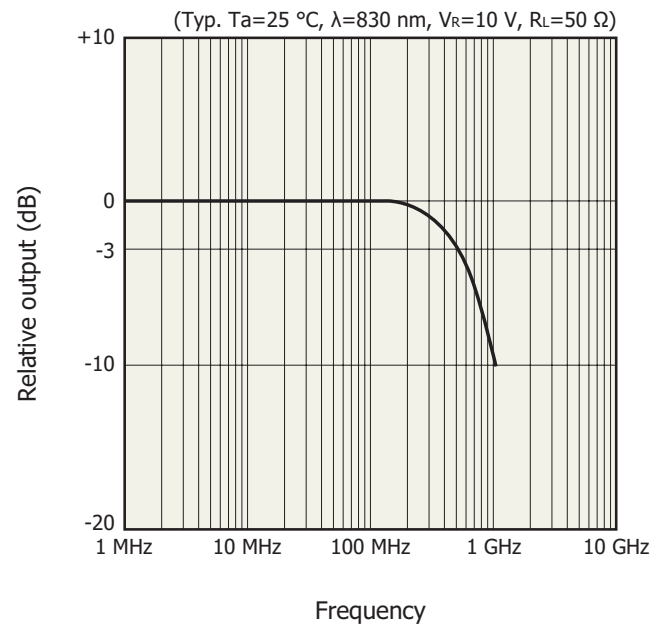

KPINB0409EA

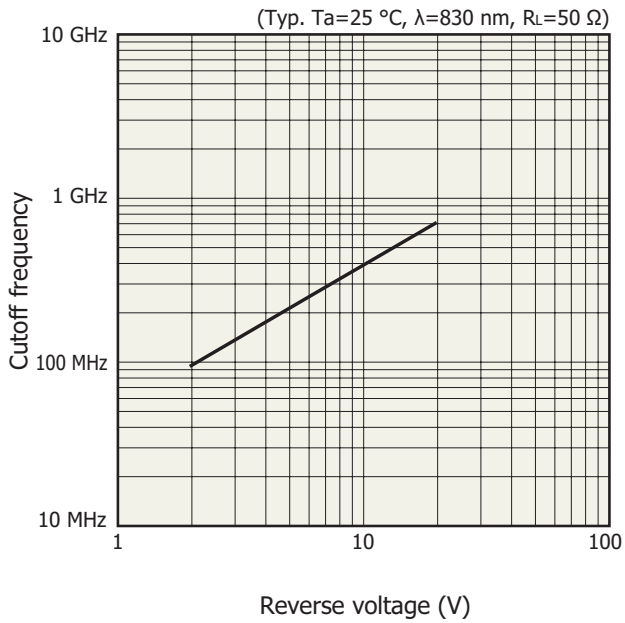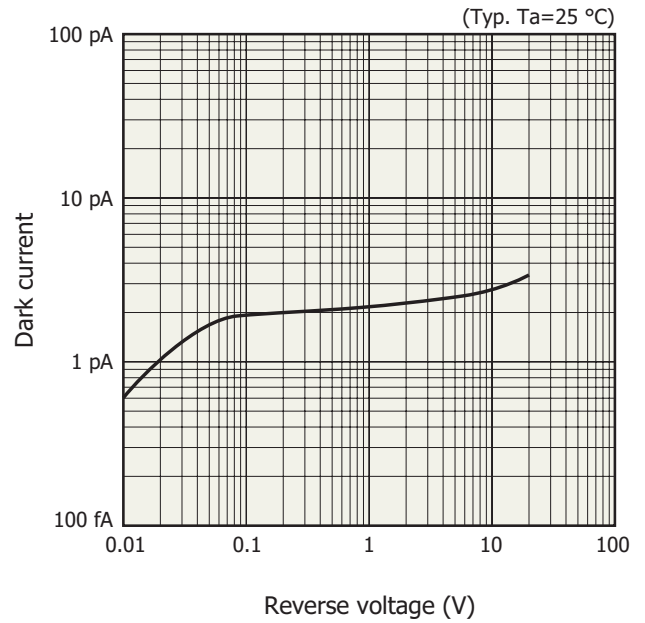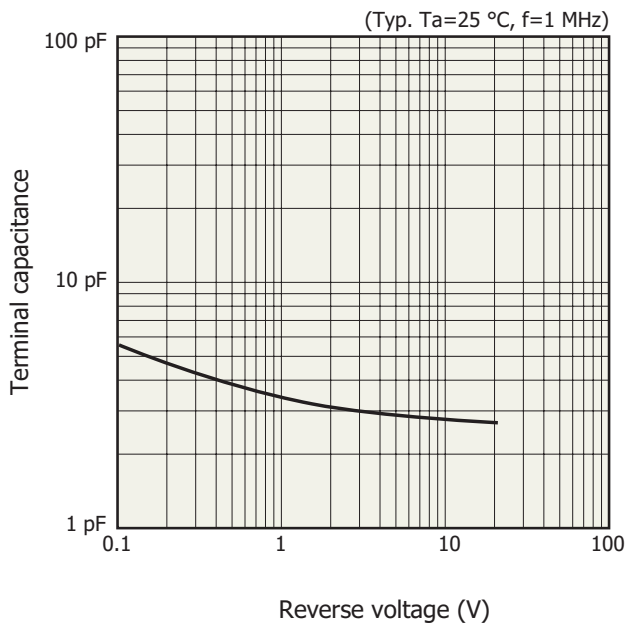
**Cutoff frequency vs. reverse voltage****Dark current vs. reverse voltage****Terminal capacitance vs. reverse voltage**

**Directivity**

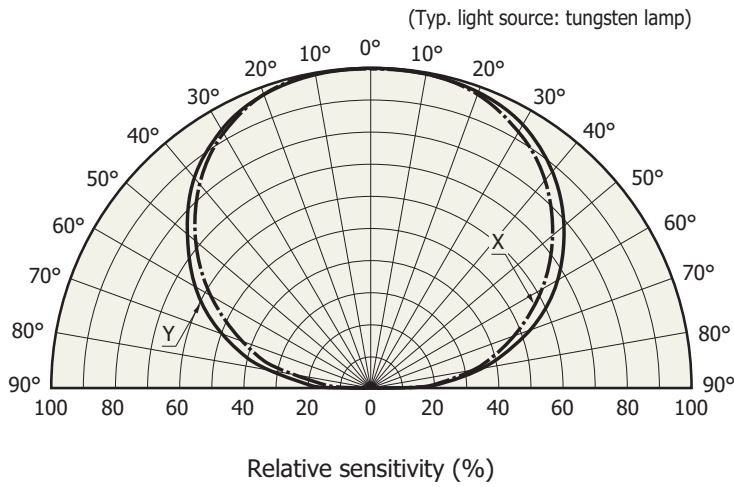

KPINB0413EA

**Dimensional outline (unit: mm)**

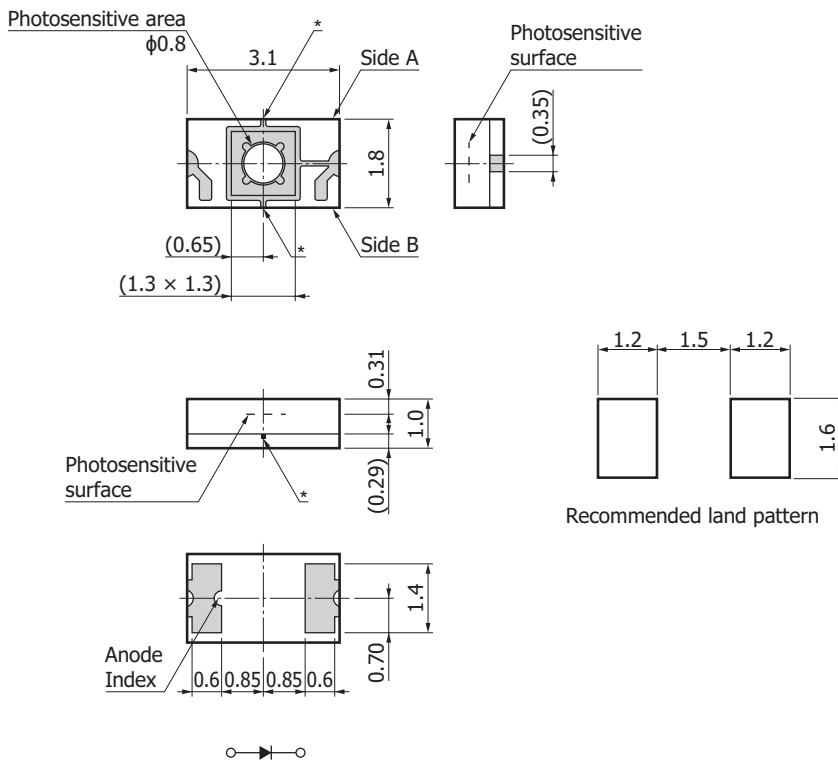

Tolerance:  $\pm 0.2$  unless otherwise noted  
 Values in parentheses indicate reference values.  
 \* Side of the element  
 \* There is exposed wiring on side A and side B.  
 To prevent short circuits, do not allow any conductors to come in contact with the wiring.

■ Electrode


KPINA0119EB

### Standard packing specifications

- Reel (conforms to JEITA ET-7200)

Dimensions	Hub diameter	Tape width	Material	Electrostatic characteristics
180 mm	60 mm	8 mm	PS	Conductive

- Embossed tape (unit: mm, material: PS, conductive)

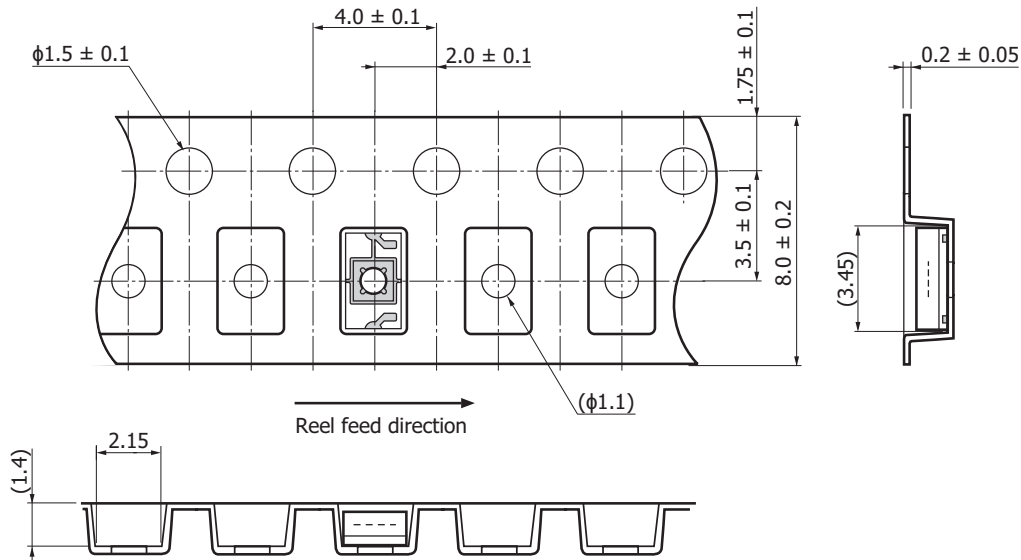

KPIN0027EA


- Packing quantity

1000 pcs/reel

- Packing type

Reel and desiccant in moisture-proof packaging (vacuum-sealed)


### Measured example of temperature profile with our hot-air reflow oven for product testing

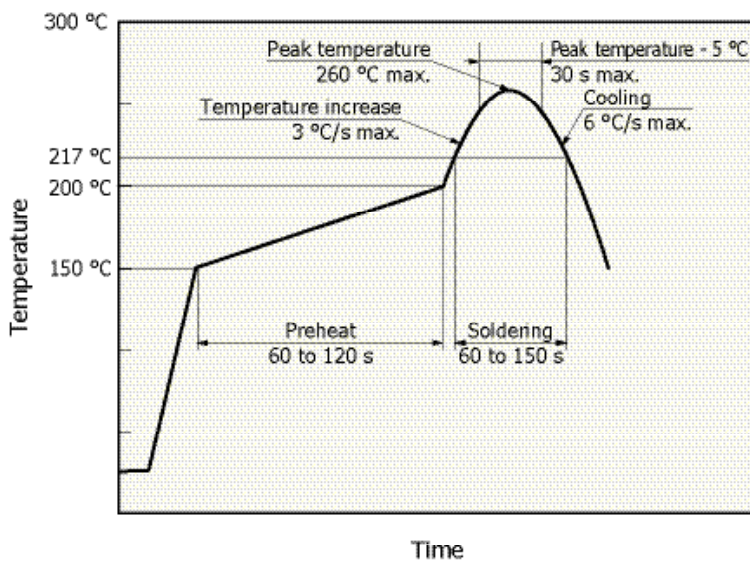


KMPDB0405EB

- This product supports lead-free soldering. After unpacking, store it in an environment at a temperature of 30 °C or less and a humidity of 60% or less, and perform soldering within 4 weeks.
- The effect that the product receives during reflow soldering varies depending on the circuit board and reflow oven that are used. When you set reflow soldering conditions, check that problems do not occur in the product by testing out the conditions in advance.

Related products: Metal package, bare chip type

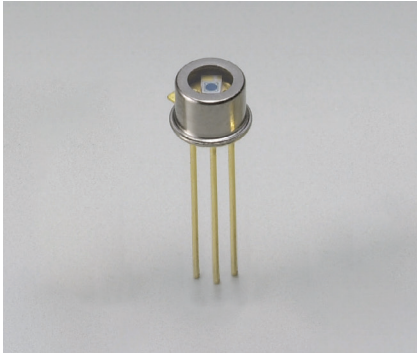

Metal package S5972

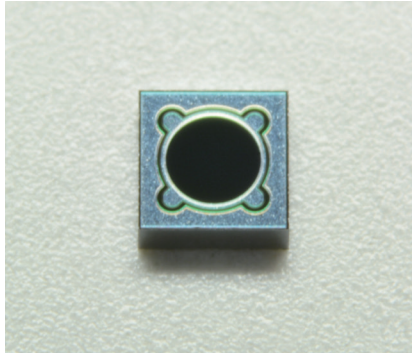

Bare chip type S5972-04

Similar products are available: the metal package S5972 and the bare chip type S5972-04.

## Related information

[www.hamamatsu.com/sp/ssd/doc\\_en.html](http://www.hamamatsu.com/sp/ssd/doc_en.html)

### ■ Precautions

- Disclaimer
- Surface mount type products

### ■ Technical information

- Si photodiodes / Application circuit examples

The content of this document is current as of September 2018.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

# HAMAMATSU

[www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218, E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8, E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10, E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777, E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01, E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41, E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866, E-mail: [hpc@hamamatsu.com.cn](mailto:hpc@hamamatsu.com.cn)

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No. 158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)03-659-0080, Fax: (886)03-659-0081, E-mail: [info@hamamatsu.com.tw](mailto:info@hamamatsu.com.tw)